Antennas and RF cables

Most of our antennas are covering all four GSM bands (Quad Band) and a lot of are covering the UMTS band as well (Penta Band). We also provide a huge range of multiband antennas for wireless communication (GSM, UMTS, BT, WLAN, ISM) and GPS.

Inside Glass Antenna Multi band UMTS/Bluetooth/WLAN ANT-GXW609-MMCX/M.....5
Inside Glass Antenna Multi band /UMTS/Bluetooth/WLAN ANT-GXW6606-FME/F.....5
Inside Glass Antenna Multi band ISM 433, TETRA, GSM quad band /UMTS/Bluetooth/WLAN ANT-GXW619-FME/F.....6
Waterproofed Antenna Multi band ISM 433 GSM quad band UMTS/Bluetooth/WLAN ANT-GXS404-FME/F.....6
Inside Glass Antenna Multi Band GSM 850/900/1800/1900/UMTS ANT-GXW110-FME/F.....7
Inside Glass Antenna Multi Band 850/900/1800/1900/UMTS ANT-GXW109-FME/F.....7
Inside Glass Antenna Multi band 850/900/1800/1900/UMTS/GPS ANT-GNW101-FME/F-SMA/M 8
Inside Glass Antenna Dual Band 900/1800 ANT-GXW209-FME/F.....8
Active GPS Antenna ANT-NXM652-SMA/M.....10
Active GPS Antenna ANT-NXM3601-SMA/M.....10
Active GPS Antenna ANT-NXG3113-UFL.....11
Active GPS Antenna ANT-NXG3119-UFL.....11
Active GPS Antenna ANT-NXG3213-UFL.....12
Active GPS Antenna ANT-NXG3219-UFL.....12
Active GPS Antenna ANT-NXG3110-UFL.....13
Active GPS Antenna ANT-NXG3125-UFL.....13
Active GPS Antenna ANT-NXG3210-UFL.....14
Active GPS Antenna ANT-NXG3602-HFL.....15
Active GPS Antenna ANT-NXG352-UFL.....15
Active GPS Antenna ANT-NXG354-UFL/ ANT-NXG354-MMCX/M.....16
Passive GPS Antenna ANT-NXG3013.....17
Passive GPS Antenna ANT-NXG3019.....17
Passive GPS Antenna ANT-NXG3025.....18
Passive GPS Antennas upon request.....18
Magnetic Antenna Multi Band 850/900/1800/1900/UMTS ANT-GXM102-FME/F - SMA/M.....19
Magnetic Antenna Multi Band 850/900/1800/1900/UMTS ANT-GXM602-FME/F -SMA/M.....19
Magnetic Antenna Multi Band 900/1800/1900/UMTS ANT-GXM632-FME/F - SMA/M.....20
Antenna Multi Band 850/900/1800/1900/GPS ANT-GNW630-FME/F-SMA/M.....20
Antenna Multi Band 850/900/1800/1900/Bluetooth/ UMTS /GPS ANT-GNW640-FME/F-SMA/M 21
Magnetic Antenna Multi Band 850/900/1800/1900/Bluetooth/ WLAN/ GPS ANT-GNM600-FME/F-SMA/M.....21
Roof Antenna Multi Band 850/900/1800/1900/Bluetooth/GPS ANT-GNR600-FME/F-SMA/M.....22
Roof Antenna Penta Band 900/1800/1900/UMTS ANT-GXR603-FME/F –SMA/M.....22
Roof Antenna Single Band TETRA ANT-SXR6609-FME/F.....23
Roof Antenna Tri Band 900/1800/1900 ANT-GXR103-FME/F –SMA/M.....23
Roof Antenna Multi Band 900/1800/1900/UMTS/ WLAN/BT/GPS ANT-GNAR6605-FME/F-SMA/M 24
Body mount GSM-R Antenna Single Band 876-925 ANT-GXR6607-N.....24
Inside Glass Multi Band / 3-Ports Antenna: 1st 900/1800/1900/UMTS 2n GPS 3rd WLAN/WIFI ANT-GNBW6602.....25
Roof Antenna/3-Ports Antenna 1st 850/900/1800/1900/UMTS/ 2nd GPS 3rd WLAN/WIFI ANT-GNBR6601.....25
Roof Antenna Multi Band 900/1800/1900/UMTS/ WLAN/BT/GPS/GLONASS ANT-GNR6603-FME/F-SMA/M.....26
Roof Antenna Quad Band 850/ 900/1800/1900/UMTS/ Bluetooth/WLAN ANT-GXR623-FME/F..26
Directive Outdoor Antenna Multi Band 900/1800 ANT-GXD1201-FME/F.....27
Yagi Antenna Quad Band 850/900/1800/1900 ANT-GXD905-SMA/M.....27
Omni-directional Outdoor Antenna Dual Band 900/1800 ANT-GXS106-FME/F (black) ANT-GXS107-FME/F (white rod).....28
Omni-directional Outdoor Antenna 850/900/1800/1900/ UMTS/Bluetooth/WLAN ANT-GXS108-FME/F 28
Omni-directional Outdoor Antenna 850/900/1800/1900/UMTS/ Bluetooth/WLAN ANT-GXS606-FME/F.....29
Waterproofed Antenna Multi Band 433/850/900/1800/ 1900/UMTS/WLAN ANT-GXS404-FME/F.....29

Roof WLAN Antenna Tri Band 2400/5000/5900 ANT-BXR6610-SMA/M-RP.....30
PCB WLAN Antenna Single Band 2400 ANT-BXP6611-UFL.....30
Omni directional WLAN Outdoor Antenna Single Band 2400 ANT-BXS6612-SMA/M-RP.....31
Directive WLAN Outdoor Antenna Tri Band 2400/5000/5900 ANT-BXD6613-N/F.....31
PCB Antenna Quad Band 850/900/1800/1900 UMTS/Bluetooth ANT-GXP114-MMCX/M 32
PCB Antenna Tri Band 900/1800/1900 ANT-GXP401-MMCX/M.....32
PCB Antenna Quad Band 850/900/1800/1900 UMTS/Bluetooth ANT-GXP115-MMCX/M.....33
PCB Antenna Quad Band 850/900/1800/1900 UMTS/Bluetooth ANT-GXP116-MMCX/M.....33
PCB Antenna Quad Band 850/900/1800/1900 UMTS/Bluetooth ANT-GXP117-MMCX/M.....34
Helical Antenna Dual Band 900/1800 ANT-GXR201-MMCX/M.....35
Draft of Helical Antenna GSM 900/1800 ANT-GXR201-MMCX/M and ANT-GXR211-MMCX/M.....36
Helical Antenna Tri Band 900/1800/1900 ANT-GXR203-MMCX/M.....37
Portable Antenna Quad Band 850/900/1800/1900 ANT-GXH914-SMA/M.....38
Portable Antenna Quad Band 850/900/1800/1900 ANT-GXH915-SMA/M.....38
Portable Antenna Quad Band 850/900/1800/1900 ANT-GXH615-SMA/M.....39
Portable Antenna Quad Band 850/900/1800/1900 ANT-GXH614-SMA/M.....39
Portable Antenna Multi Band 850/900/1800/1900/ UMTS/Bluetooth ANT-GXH616-FME/F.....40
Portable Antenna Multi Band 850/900/1800/1900/ UMTS/Bluetooth ANT GXH617-FME/F.....40
Portable Antenna Multi Band 850/900/1800/1900/ UMTS/Bluetooth ANT-GXH6604-SMA/M.....41
Portable Antenna Multi Band 850/900/1800/1900 ANT-GXH911-SMA/M.....41
Portable Antenna Multi Band 850/900/1800/1900/UMTS/Bluetooth ANT-GXH918-TNC/M.....42
Portable Antenna Tri Band 900/1800/1900 ANT-GXH204-SMA/M.....42
Portable Antenna Tri Band 900/1800/1900 ANT-GXH205-SMA/M.....43
Portable Antenna Dual Band 900/1800 ANT-GXH254-FME/F.....43
Portable Antenna Dual Band 900/1800 ANT-GXH255-FME/F.....44
Portable Antenna Tri Band 900/1800/1900 ANT-GXH206-SMA/M.....44
Portable Antenna Dual Band 900/1800 ANT-GXH902-FME/F.....45
Portable Antenna Dual Band 900/1800 ANT-GXH111-SMA/M.....45
Ultra Small Antenna Quad Band GSM 850/900/1800/1900/UMTS ANT-GXE474 46
Ultra Slim Antenna Penta Band GSM 850/900/1800/1900/UMTS ANT-GXE3301 46
Ultra Slim Antenna Tri Band GSM 900 /1800/1900 ANT-GXE477.....47
Ultra Slim Antenna Tri Band GSM 900/1800/1900 ANT-GXE475 47
Ultra Slim Antenna Multi Band GSM 900/1800/1900/UMTS ANT-GXE476 48
Ultra Slim Antenna Bluetooth ANT-BXE480.....48
Ultra Slim Antenna GPS ANT-GXE490.....49
PCB Antenna Quad Band 850/900/1800/1900 ANT-GXE479-GSC.....49
Helical Antenna ISM Band 868 MHz ANT-IXE902.....50
Helical Antenna ISM Band 868 MHz ANT-IXE903.....50
Cable CAB-FME/F500FME/M.....51
Cable CAB-FME/F500SMA/M.....51
Cable CAB-RFR501-X MMCX/M to FME/M bulkhead.....51
Cable CAB-RFR502-X MMCX/M to FME/M.....51
Cable CAB-RFR503-X MMCX/M to SMA/F bulkhead.....51
Cable CAB-RFR505-X MMCX/M to slim FME/M bulkhead.....52
Cable CAB-RFR506-X MMCX/M to SMA/F bulkhead.....52
Cable CAB-RFR523-60 MMCX/M to SMA/F bulkhead.....52
Cable CAB-RFR551-X U.FL to FME/M bulkhead.....53
Cable CAB-RFR701-X GSC to FME/M bulkhead.....53
Cable CAB-RFR703-X GSC to FME/M bulkhead.....53
Cable CAB-RFR553-X U.FL to SMA/F bulkhead.....54
Cable CAB-RFR561-X FME/F to FME/M bulkhead.....54
Cable CAB-RFR602-150.....54
Cable CAB-RFR701-100 GSC straight to FME/M bulkhead.....54
Cable CAB-RFR703-100 GSC straight to SMA/M bulkhead.....55
Cable CAB-RFR901-X MMCX/M to bared end.....55
Cable CAB-RFR811-X SMA/F bulkhead to bared end.....55
Cable CAB-RFR913-X FME/M bulkhead bared end.....55
Cable CAB-RFR951-X MMCX/M to TNC bulkhead.....55
Cable CAB-RFR952-X MMCX/M to SMA bulkhead.....56
CAB-SMA/M200SMA/M-X cable SMA male to SMA female.....56
Customised cable example with MC380 connector.....56
Example CAB-RFR953 TNC/F bulkhead to TNC male.....56
Example CAB-RFR954 MMCX/M straight to SMA/F.....57
Customised CAB-RFR956 MMCX/M to open end.....57
Customised CAB-RFR959.....57
Customised CAB-RFR960 U.FL to SMA.....58
Connector FME/M bulkhead D3G.....59
Connector SMA/F straight crimp female.....60
Connector MMCX/M right angle male 30G.....61
PCB mounted connectors (SMT):.....62

GSM / UMTS frequency ranges

GSM frequency range RX
GSM 850 (also called GSM 800)
869 to 894 MHz

GSM 900, E-GSM 900
935 to 960 MHz
925 to 935 MHz

GSM 1800
1805 to 1880 MHz

GSM 1900
1930 to 1990 MHz

UMTS (also called WCDMA)
1920 to 1990 MHz

Bluetooth
2.4 GHz

GSM frequency range TX
GSM 850 (also called GSM 800)
824 to 849 MHz

GSM 900, E-GSM 900
890 to 915 MHz
880 to 890 MHz

GSM 1800
1710 to 1785 MHz

GSM 1900
1850 to 1910 MHz

UMTS (also called WCDMA)
2110 to 2170 MHz

Wireless Local Area Network (WLAN)
2.4 GHz

Please feel free to come back with inquiries on antennas that are not listed, customized antennas, antenna cables or any other questions on this topic.

"Speaking" part numbers

First, second and third letter (third letter only if 4 letters in total) = provided bands
A = AM/FM Radio
G = GSM und UMTS
N = GPS (Navigation)
B = Wireless Lan and Bluethooth 2,4 GHz port (extra cable)
I = ISM 433 / 868 / 915
F = 4 meter Band
T = 2 meter Band
S = 70 cm Band (Tetra and more)
X = not used

Letter before number = Type of mounting/antenne
R = Roof mounting
W = Window mounting
S = Stationary mounting
P = PCB type
M = Magnetic mount
D = Directional antenna
H = Housing
E = Embedded antenna

Example:
ANT-GNBW6602 → Antenna with GSM, GPS and WLAN port for windscreen mounting

Inside Glass Antenna Multi band UMTS/Bluetooth/WLAN ANT-GXW609-MMCX/M

Inside glass antenna multi band including 2500 mm RG 174 cable for use in wireless communication. It provides extra small form factor.



Technical data

Frequency range:
GSM 850 / AMPS: 824-894 MHz
GSM 1800:1710 - 1880 MHz
PCN 1.9 GHz,
UTMS 2.1 GHz,
Bluetooth / WLAN 2.4 GHz
Impedance: 50 Ohm
Max power: 25 W
VSWR: <
Gain: 0 dBi
Cable length: RG 174 2500 mm with MMCX male
Dimensions in mm: 75 x 25 x 3
Temperature: -40 – 85 °C

This small antenna covers the 868, 915, GSM 850 (also called GSM 800), GSM 900, GSM 1800 and GSM 1900 - UMTS up to Bluetooth and WLAN as well.

ANT-GXW609-SMA/M
ANT-GXW609-FME/F

Other antenna connectors upon request.

Inside Glass Antenna Multi band /UMTS/Bluetooth/WLAN ANT-GXW6606-FME/F

Inside glass antenna multi band including 2500 mm RG 174 cable for use in wireless communication.



Technical data

Frequency range:
GSM 850 / AMPS: 824-894 MHz
GSM 1800:1710 - 1880 MHz
PCN 1.9 GHz,
UTMS 2.1 GHz,
Bluetooth / WLAN 2.4 GHz
Impedance: 50 Ohm
Max power: 35 W
VSWR: < 2.0
Gain: 2.2 dBi
Cable length: RG 174 2500 mm with FME female
Dimensions in mm: 112 x 59 x 3
Temperature: -40 – 85 °C

This antenna covers 868, 915, GSM 850 (also called GSM 800), GSM 900, GSM 1800 and GSM 1900 - UMTS up to Bluetooth and WLAN as well.

ANT-GXW6606-SMA/M
ANT-GXW6606-MMCX/M

Other antenna connectors or cable type (RG58) upon request.

Inside Glass Antenna Multi band ISM 433, TETRA, GSM quad band /UMTS/Bluetooth/WLAN ANT-GXW619-FME/F

Inside glass antenna multi band including 2500 mm RG 174 cable for use in wireless communication.



Technical data

Frequency range:
ISM 433MHz
GSM 850 / AMPS: 824-894 MHz
GSM 1800:1710 - 1880 MHz
PCN 1,9 GHz,
UTMS 2,1 GHz,
Bluetooth / WLAN 2,4 GHz
Impedance: 50 Ohm
Max power: 20 W
Return loss: >12 dB
Gain: 2.2 dBi
Cable length: RG 174 2500 mm with FME female
Dimensions in mm: 128 x 23 x 3

This antenna covers the ISM bands 434, TETRA, 868, 915, GSM 850 (also called GSM 800), GSM 900, GSM 1800 and GSM 1900 but UMTS up the Bluetooth and WLAN as well.

Other antenna connectors upon request.

Waterproofed Antenna Multi band ISM 433 GSM quad band UMTS/Bluetooth/WLAN ANT-GXS404-FME/F

Inside glass antenna multi band including 2500 mm RG 174 cable for use in wireless communication.



Technical data

Frequency range:
ISM 433MHz
GSM 850 / AMPS: 824-894 MHz
GSM 1800:1710 - 1880 MHz
PCN 1,9 GHz,
UTMS 2,1 GHz,
Bluetooth / WLAN 2,4 GHz
Impedance: 50 Ohm
Max power: 20 W
Return loss: >12 dB
Gain: 2.2 dBi
Cable length: RG 174 2500 mm with FME female
Dimensions in mm: 120 x 20 x 2

This antenna covers the ISM bands 434, 868, 915, GSM 850 (also called GSM 800), GSM 900, GSM 1800 and GSM 1900 but UMTS up the Bluetooth and WLAN as well. Based on the shrink tube it is waterproofed and can be used outdoor.

ANT-GXS404-MMCX/M
ANT-GSX404-SMA/M

Other antenna connectors upon request.

Inside Glass Antenna Multi Band GSM 850/900/1800/1900/UMTS ANT-GXW110-FME/F

Inside glass antenna multi band including 2500 mm RG 174 cable for use in wireless communication.



Technical data GSM / UMTS

Frequency range:
GSM 850 / 900: 824 - 960 MHz
GSM 1800:1710 – 1880 MHz
GSM 1900 / UMTS: 1920 - 2170 MHz
Impedance: 50 Ohm
Max power: 20 W
Return loss: >12 dB
Gain: 2.2 dBi
Cable length: RG 174 2500 mm with FME female
Diameter/Height in mm: 55 / 5

ANT-GXW110-SMA/M RG 174 2500 mm, connector SMA male.

Other antenna connectors upon request.

Inside Glass Antenna Multi Band 850/900/1800/1900/UMTS ANT-GXW109-FME/F

Inside glass antenna multi band including 2500 mm RG 174 cable for use in wireless communication.



Technical data GSM / UMTS

Frequency range:
GSM 850 / 900: 824 - 960 MHz
GSM 1800:1710 - 1880 MHz
GSM 1900 / UMTS: 1920 - 2170 MHz
Impedance: 50 Ohm
Max power: 20 W
Return loss: >12 dB
Gain: 2.2 dBi
Cable length: RG 174 2500 mm with FME female
Dimensions in mm: 95 x 24 x 6

ANT-GXW109-SMA/M RG 174 2500 mm, connector SMA male.

Other antenna connectors upon request.

Inside Glass Antenna Multi band 850/900/1800/1900/UMTS/GPS ANT-GNW101-FME/F-SMA/M

Inside glass antenna multi band including two cables 2500 mm RG 174 for use in wireless communication.



Technical data GSM / UMTS

Frequency range:
GSM 850 / 900: 824 - 960 MHz
GSM 1800:1710 - 1880 MHz
GSM 1900 / UMTS: 1920 - 2170 MHz
Impedance: 50 Ohm
Max power: 20 W
Return loss: >12 dB
Gain: 2.2 dBi
Cable length: RG 174 2500 mm +/- 150mm with FME female
Dimensions in mm: 120 x 25

Technical data GPS

Center frequency: 1575.42 MHz
Band width: ± 1,023 MHz
VSWR: 2.0 max.
Impedance: 50 Ohm
Current consumption: 11±5 mA max
Power gain: 27 ± 5 dBi min
Noise figure: 1,8÷2,2 dB max.
Supply voltage: 3 ÷ 5 volts
Temperature: -30°C ÷ +85°C
Cable length: RG 174 2500 mm +/- 150mm with SMA male.

Compatible to AarLogic GPS 3M

Other antenna connectors upon request.

Inside Glass Antenna Dual Band 900/1800 ANT-GXW209-FME/F

Inside glass antenna dual band including 3000 mm RG 174 cable for use in wireless communication.



Technical data GSM

Frequency range:
GSM 900: 890 - 960 MHz
GSM 1800:1710 - 1880 MHz
Bandwidth: A: 70 MHz B: 170 MHz
Impedance: 50 Ohm
Max power: 25 W
Gain: 2.2dBi
VSWR: A: < = 1,7; B: < = 2,1
Cable length: RG 174 3000 mm with FME female
Dimensions in mm: 115 x 22 x 4

ANT-GXW209-SMA/M 3000mm +/- 50mm, connector SMA Male

Other antenna connectors upon request.

Active GPS Antenna ANT-NXM652-SMA/M

Active GPS antenna including 2500 mm RG 174 cable.




Technical data GPS

Center frequency: 1575.42 MHz
Band width: ± 1,023 MHz
VSWR: 2.0 max.
Impedance: 50 Ohm
Current consumption: 20 mA max.
Power gain: 26dB at 3V, 28dB at 5V
Noise figure: 1,8÷2,2 dB max.
Supply voltage: 2.7 ÷ 5 Volt
Temperature: -40°C ÷ +85°C
Cable length: RG174 2.5 m with SMA/M
GPS System gain: < 24dBi
(2.5m RG174, 2.85V, 2 connectors
Dimensions in mm: 38 x 34 x 13,7

Compatible to AarLogic GPS 3M

This antenna has the benefit, that it can be mounted on dashboard, behind the windscreen or outside on the roof with its magnet.

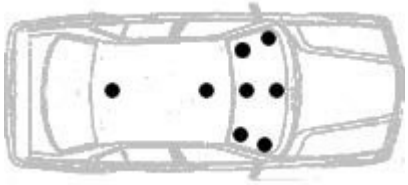

Other antenna connectors upon request.

Active GPS Antenna ANT-NXM3601-SMA/M

Active GPS antenna including 5000 mm RG 174 cable and magnetic mount.



(Successor of ANT-NXM302)

Technical data GPS

Center frequency: 1575.42 MHz
Band width: ± 1,023 MHz
VSWR: < 2.0
Impedance: 50 Ohm
Current consumption: 15 - 20mA
Power gain: 24 - 30 dBi
Noise figure: 1.5 – 2.2 dB
Supply voltage: 2.7 – 3.3 Volt
Temperature: -40° to +85° C with high humidity
Cable length: RG 174 5000 mm with SMA male
Dimensions in mm: 37.4 x 34 x 13.0


Operates on 2.7 to 3.3 Volts only. For use with Lassen SQ, Lassen LP and M-Loc GPS modules. *Not recommend for use with GM862-GPS or GM863-GPS, because the supply voltage of both modules is higher then 3.3 Volt.*

Trimble manufactures a variety of antenna styles and types to suit the most varied applications. All include a low-noise amplifier (LNA) to provide sensitive performance in the toughest environments (–40° to +85° C with high humidity). All feature the famous Trimble quality and reliability gained from nearly two decades of building GPS antennas for commercial
and military requirements.

ANT-NXM3601-MCX/M RG174 5000 mm with MCX male

Active GPS Antenna ANT-NXG3113-UFL

Active (I-stage) GPS antenna including 80 mm cable for indoor/inside car use.



Technical data GPS

Center frequency: 1575.42 MHz
Patch size: 13x13mm
Band width: ± 1,023 MHz
VSWR: 2.0 max.
Impedance: 50 Ohm
Current consumption: 13 mA typical
Power gain: 15 dB
Noise figure: 1.3dB max.
Supply voltage: 2.5 – 3.5 Volt
Temperature: -40° to +85° C with high humidity
Cable length: 80 mm with HFL right-angle
Dimensions in mm: 13x13x7.1


Compatible to AarLogic GPS 3M

This is an ultra-compact, active, GPS antenna used for demanding next-generation mobile product applications. It has no external packaging to provide greater flexibility in embedding in your application.

Other antenna connectors upon request.

Active GPS Antenna ANT-NXG3119-UFL

Active (I-stage) GPS antenna including 80 mm cable for indoor/inside car use.



Technical data GPS

Center frequency: 1575.42 MHz
Patch size: 18x18mm
Band width: ± 1,023 MHz
VSWR: 2.0 max.
Impedance: 50 Ohm
Current consumption: 13mA typical
Power gain: 16dB
Noise figure: 1.3dB max.
Supply voltage: 2.5 – 3.5 Volt
Temperature: -40° to +85° C with high humidity
Cable length: 80 mm with UFL right-angle
Dimensions in mm: 18.5x18.5x7.1


Compatible to AarLogic GPS 3M

This is an ultra-compact, active, GPS antenna used for demanding next-generation mobile product applications. It has no external packaging to provide greater flexibility in embedding in your application.

Other antenna connectors upon request.

Active GPS Antenna ANT-NXG3213-UFL

Active (II-stage) GPS antenna including 80 mm cable for indoor/inside car use.



Technical data GPS


Center frequency: 1575.42 MHz
Patch size: 13x13mm
Band width: ± 1,023 MHz
VSWR: 2.0 max.
Impedance: 50 Ohm
Current consumption: 16.5 mA typical
Power gain: 28 dB
Noise figure: 1.3dB max.
Supply voltage: 2.5 – 3.5 Volt
Temperature: -40° to +85° C with high humidity
Cable length: 80 mm with HFL right-angle
Dimensions in mm: 13x13x7.1

This is an ultra-compact, active, GPS antenna used for demanding next-generation mobile product applications. It has no external packaging to provide greater flexibility in embedding in your application.

Other antenna connectors upon request.

Active GPS Antenna ANT-NXG3219-UFL

Active (II-stage) GPS antenna including 80 mm cable for indoor/inside car use.



Technical data GPS

Center frequency: 1575.42 MHz
Patch size: 18x18mm
Band width: ± 1,023 MHz
VSWR: 2.0 max.
Impedance: 50 Ohm
Current consumption: 16.5 mA typical
Power gain: 28 dB
Noise figure: 1.3dB max.
Supply voltage: 2.5 – 3.5 Volt
Temperature: -40° to +85° C with high humidity
Cable length: 80 mm with UFL right-angle
Dimensions in mm: 18.5x18.5x7.1

This is an ultra-compact, active, GPS antenna used for demanding next-generation mobile product applications. It has no external packaging to provide greater flexibility in embedding in your application.

Other antenna connectors upon request.

Active GPS Antenna ANT-NXG3110-UFL

Active (I-stage) GPS antenna including 80 mm cable for indoor/inside car use.



Technical data GPS

Center frequency: 1575.42 MHz
Patch size: 10x10mm
Band width: ± 1,023 MHz
VSWR: 2.0 max.
Impedance: 50 Ohm
Current consumption: 11 mA typical
Power gain: 15 dB
Noise figure: 1.3dB max.
Supply voltage: 2.5 – 3.5 Volt
Temperature: -40° to +85° C with high humidity
Cable length: 50 mm with HFL right-angle
Dimensions in mm: 10x10x6.2


Compatible to AarLogic GPS 3M

This is an ultra-compact, active, GPS antenna used for demanding next-generation mobile product applications. It has no external packaging to provide greater flexibility in embedding in your application.

Other antenna connectors upon request.

Active GPS Antenna ANT-NXG3125-UFL

Active (I-stage) GPS antenna including 80 mm cable for indoor/inside car use.



Technical data GPS

Center frequency: 1575.42 MHz
Patch size: 25x25mm
Band width: ± 1,023 MHz
VSWR: 2.0 max.
Impedance: 50 Ohm
Current consumption: 13mA typical
Power gain: 17dB
Noise figure: 1.3dB max.
Supply voltage: 2.5 – 3.5 Volt
Temperature: -40° to +85° C with high humidity
Cable length: 80 mm with UFL right-angle
Dimensions in mm: 25.3x25.3x7.5

Compatible to AarLogic GPS 3M

This is an ultra-compact, active, GPS antenna used for demanding next-generation mobile product applications. It has no external packaging to provide greater flexibility in embedding in your application.

Other antenna connectors upon request.

Active GPS Antenna
ANT-NXG3210-UFL

Active (II-stage) GPS antenna including 80 mm cable for indoor/inside car use.



Technical data GPS

Center frequency: 1575.42 MHz
Patch size: 10x10mm
Band width: ± 1,023 MHz
VSWR: 2.0 max.
Impedance: 50 Ohm
Current consumption: 13 mA typical
Power gain: 25 dB
Noise figure: 1.4dB max.
Supply voltage: 2.5 – 3.5 Volt
Temperature: -40° to +85° C with high humidity
Cable length: 50 mm with HFL right-angle
Dimensions in mm: 10x10x6.2

This is an ultra-compact, active, GPS antenna used for demanding next-generation mobile product applications. It has no external packaging to provide greater flexibility in embedding in your application.

Other antenna connectors upon request.

Active GPS Antenna ANT-NXG3602-HFL

Active GPS antenna including 80 mm cable for indoor/inside car use.



(Successor of ANT-NXG303-HFL)

Technical data GPS

Center frequency: 1575.42 MHz
Band width: ± 1.023 MHz
VSWR: 2.0 max.
Impedance: 50 Ohm
Current consumption: 5 - 13 mA
Power gain: 24 - 30 dB
Supply voltage: 2.7 – 3.3 Volt
Temperature: -40° - 85° C with high humidity
Cable length: 85 mm with HFL right-angle
Weight: 20 g (typical)
Dimensions in mm: 22 x 21 x 8

This is an ultra-compact, active, GPS antenna used for demanding next-generation mobile product applications. It has no external packaging to provide greater flexibility in embedding in your application.

Not recommend for use with AarLogic GPS 3M, GM862-GPS or GM863-GPS, due gain level and supply voltage

Other antenna connectors upon request.

Active GPS Antenna ANT-NXG352-UFL

Active GPS antenna including 80 mm cable for indoor/inside car use.



Technical data GPS

Center frequency: 1575.42 MHz
Band width: ± 1,023 MHz
VSWR: 2.0 max.
Impedance: 50 Ohm
Current consumption:
At 3.0 V typ. 13 mA max.16 mA
At 5.0 V typ.18 mA max. 22 mA
Power gain: 28 ± 4,5dB
Noise figure: 1.5dB max.
Supply voltage: 2,5 – 5,5 Volt
Temperature: -40° to +85° C with high humidity
Cable length: 80 mm with UFL right-angle
Dimensions in mm: 25 x 25 x 8

Not recommended for AarLogic GPS 3M due gain level

Features

- Customised ground planes size and shape available
- High performance 30dB + gain – suitable for indoor and outdoor environments
- Low power consumption
- High gain, Low noise < 1.5dB
- Excellent temperature stability and out-band rejection
- Wide band input voltage
- Compatible with every GPS receiver
- Variety of applications in GPS car navigation systems, aviation, and handheld devices

Other antenna connectors and cable length upon request.

Active GPS Antenna ANT-NXG354-UFL/ ANT-NXG354-MMCX/M

Active GPS antenna including 80 mm cable for indoor/inside car use.



Technical data GPS

Center frequency: 1575.42 MHz
Band width: ± 1,023 MHz
VSWR: 2.0 :1 max.
Impedance: 50 Ohm
Current consumption: 13 mA max.
Power gain: 25 dB
Noise figure: 1,4dB Typ.
Supply voltage: 2.5 – 5.5 Volt
Cable length: 80 mm with UFL / MMCX right-angle
Weight: < 50g
Dimensions in mm: 13.4 x 13.4 x 5.5

Not recommended for AarLogic GPS 3M due gain level

This is an ultra-compact, active, GPS antenna used for demanding next-generation mobile product applications. It has no external packaging to provide greater flexibility in embedding in your application.

Other antenna connectors upon request.

Passive GPS Antenna ANT-NXG3013

Passive (no LNA) GPS antenna. Mounting via pin and double sided adhesive.



Technical data GPS

Center frequency*: 1575 ± 2 MHz in custom housing and groundplane*
Patch size: 13x13x4 mm
Band width: 8 MHz min. at Return Loss lower than -10 dB
VSWR: 1.5 max.
Polarization: RHCP
Impedance: 50 Ohm
Gain at Zenith: -1.2 dBiC
Temperature: -40° to +105° C

Compatible to AarLogic GPS 3M

This is an ultra-compact, passive GPS antenna used for demanding next-generation mobile product applications. It is placed directly onto you PCB and therefore has no external packaging to provide greater flexibility in embedding in your application.

** Center frequency depends on size of your groundplane. A smaller groundplane lowers the center frequency.*

Other antenna connectors upon request.

Passive GPS Antenna ANT-NXG3019

Passive (no LNA) GPS antenna. Mounting via pin and double sided adhesive.



Technical data GPS

Center frequency*: 1575 ± 2 MHz in custom housing and groundplane*
Patch size: 18.5x18.5x4 mm
Band width: 8 MHz min. at Return Loss lower than -10 dB
VSWR: 1.5 max.
Polarization: RHCP
Impedance: 50 Ohm
Gain at Zenith: -0.3 dBiC
Temperature: -40° to +105° C

Compatible to AarLogic GPS 3M

This is an ultra-compact, passive GPS antenna used for demanding next-generation mobile product applications. It is placed directly onto you PCB and therefore has no external packaging to provide greater flexibility in embedding in your application.

** Center frequency depends on size of your groundplane. A smaller groundplane lowers the center frequency.*

Other antenna connectors upon request.

Passive GPS Antenna ANT-NXG3025

Passive (no LNA) GPS antenna. Mounting via pin and double sided adhesive.



Technical data GPS

Center frequency*: 1581 ± 2 MHz on 70 mm² groundplane*
Patch size: 25x25x4 mm
Band width: 15 MHz min. at Return Loss lower than -10 dB
VSWR: 1.5 max.
Polarization: RHCP
Impedance: 50 Ohm
Gain at Zenith: 5 dBi
Temperature: -40° to +85° C

Compatible to AarLogic GPS 3M

This is an ultra-compact, passive GPS antenna used for demanding next-generation mobile product applications. It is placed directly onto you PCB and therefore has no external packaging to provide greater flexibility in embedding in your application.

** Center frequency depends on size of your groundplane. A smaller groundplane lowers the center frequency.*

Passive GPS Antennas upon request

All passive (no LNA) GPS antennas are mounted via pins and adhesive. Passive patches are available from 12 to 25mm footprint.





Typical Technical data GPS

Center frequency*: 1575 - 1581 MHz
Patch size: 12 to 25 mm
VSWR: < 1.5
Impedance: 50 Ohm
Gain at Zenith: depends on patch size
Temperature: -40° to +85° C with high humidity

Due its internal LNA all passive GPS antennas are compatible to AarLogic GPS 3M

** Center frequency depends on size of your groundplane. A smaller groundplane lowers the center frequency.*

Other antenna connectors upon request.

Magnetic Antenna Multi Band 850/900/1800/1900/UMTS ANT-GXM102-FME/F - SMA/M

Magnetic roof antenna including 2500 mm RG 174 cable for use in wireless communication.



Technical data GSM / UMTS

Frequency range:
GSM 850 / 900: 824 - 960 MHz
GSM 1800:1710 - 1880 MHz
GSM 1900 / UMTS: 1920 - 2170 MHz

VSWR 824 - 960:< 1,6
VSWR 1710 - 1990:< 1.5
VSWR 1900 - 2100:< 2.0
Impedance: 50 Ohm
Max power: 20 W
Rod length: 88 mm
Gain: 2.2 dBi
Cable length: RG 174 2500 mm with FME female
Polarization: Vertical

ANT-GXM102-SMA/M RG 174 2500 mm, connector SMA male
Other antenna connectors upon request.

Magnetic Antenna Multi Band 850/900/1800/1900/UMTS ANT-GXM602-FME/F -SMA/M

Magnetic roof antenna including 2500 mm RG 174 cable for use in wireless communication.



Technical data GSM / UMTS

Frequency range:
GSM 850 / 900: 824 - 960 MHz
GSM 1800:1710 - 1880 MHz
GSM 1900 / UMTS: 1920 - 2170 MHz

VSWR :< 2
Max power: 20 W
Rod length: 88 mm
Gain: 2.2 dBi
Cable length: RG 174 2500 mm with FME female
Polarization: Vertical
Rod length: 88 mm

ANT-GXM602-SMA/M RG 174 2500 mm, connector SMA male
Other antenna connectors upon request.

Magnetic Antenna Multi Band 900/1800/1900/UMTS ANT-GXM632-FME/F - SMA/M

Magnetic roof antenna including 2500 mm RG 174 cable for use in wireless communication.



Technical data GSM / UMTS

Frequency range:
900: 860 - 960 MHz
GSM 1800:1710 - 1880 MHz
GSM 1900: 1920 - 1990 MHz
UMTS: 1920 - 2170 MHz
VSWR 824 - 960:< 2.0
Impedance: 50 Ohm
Max power: 20 W
Rod length: 290 mm
Gain: 5.0 dBi
Cable length: RG 174 2500 mm with FME female
Polarization: Vertical
Cable: RG 174 2500 mm
Connector FME/F or SMA/M

Other antenna connectors upon request.

Antenna Multi Band 850/900/1800/1900/GPS ANT-GNW630-FME/F-SMA/M

Low profile antenna for wireless communication with 2500 mm RG 174 cable.



Technical data GSM / UMTS

Frequency range:
GSM 850 / 900: 824 - 960 MHz
GSM 1800:1710 - 1880 MHz
GSM 1900: 1920 - 1990 MHz
Impedance: 50 Ohm
Max power: 20 W
VSWR: <2
Gain: 2.2 dBi
Cable length: RG 174 2500 mm FME/F
Dimensions in mm: Dia 77 x 12

Technical data GPS

Center frequency: 1575.42MHz
Band width: ± 1 MHz
Impedance: 50 Ohm
Current consumption: 20 mA max
Gain: 26 dBi at 3 V / 28 dBi at 5 V
Noise figure: 1,2 dBi
Supply voltage: 2,7 - 5,5 volts
Temperature -40° C to +90° C
Cable length: 2500 mm with SMA male

This very low profile antenna comes with high gain and low VSWR..

Application examples

- On dashboard of trucks or cars
- Behind windows of trucks or cars

Other antenna connectors upon request.

Antenna Multi Band 850/900/1800/1900/Bluetooth/ UMTS /GPS ANT-GNW640-FME/F-SMA/M

Low profile magnetic antenna for wireless communication with 2500 mm RG 174 cable.



Technical data GSM / UMTS

Frequency range:
GSM 850 / 900: 824 - 960 MHz
GSM 1800:1710 - 1880 MHz
GSM 1900 / UMTS: 1920 - 2170 MHz
Bluetooth 2,4 GHz
Impedance: 50 Ohm
Max power: 20 W
VSWR: <2.0
Gain: 2.2 dBi
Cable length: RG 174 2500 mm FME/F
Dimensions in mm: Dia 52.5 x 13

Technical data GPS

Center frequency: 1575.42MHz
Band width: ± 1 MHz
Impedance: 50 Ohm
Current consumption: 20 mA max
Gain: 26 dBi at 3 V / 28 dBi at 5 V
GPS System gain: < 24dBi
(2.5m RG174, 2.85V, 2 connectors)
Noise figure: 1,2 dBi
Supply voltage: 2,7 - 5,5 volts
Temperature -40° C to +90° C

This very low profile antenna is ground plane independent and can be mounted on metal (magnetic) or plastic. The flat design protects against vandalism.

Application examples

- On dashboard of trucks or cars
- Behind windows of trucks or cars

Other antenna connectors upon request.

Magnetic Antenna Multi Band 850/900/1800/1900/Bluetooth/ WLAN/ GPS ANT-GNM600-FME/F-SMA/M

Low profile magnetic antenna for wireless communication with 2500 mm RG 174 cable.



Technical data GSM / UMTS

Frequency range:
GSM 850 / 900: 824 - 960 MHz
GSM 1800:1710 - 1880 MHz
GSM 1900 / UMTS: 1920 - 2170 MHz
Bluetooth / WLAN 2,4 GHz
Impedance: 50 Ohm
Max power: 20 W
VSWR: <2.0
Gain: 2.2 dBi
Cable length: RG 174 2500 mm FME/F
Dimensions in mm: 74 x 80 x 13

Technical data GPS

Center frequency: 1575.42MHz
Band width: ± 1 MHz
Impedance: 50 Ohm
Current consumption: 20 mA max
Power gain: 27 dBi
Noise figure: 1,2 dBi
GPS System gain: < 24dBi
(2.5m RG174, 2.85V, 2 connectors)
Supply voltage: 2,7 - 5,5 volts
Temperature -40° C to +90° C

This very low profile antenna comes with high gain and low VSWR. The flat design protects against vandalism.

Application examples

- On roof of trucks or cars
- On roof of busses

Other antenna connectors upon request.

Roof Antenna Multi Band 850/900/1800/1900/Bluetooth/ GPS ANT-GNR600-FME/F-SMA/M

Low profile roof antenna dual band for wireless communication with 2500 mm cable RG 174.



Technical data GSM / UMTS

Frequency range:
GSM 850 / 900: 824 - 960 MHz
GSM 1800:1710 - 1880 MHz
GSM 1900 / UMTS: 1920 - 2170 MHz
WIFI 2,4 GHZ, Bluetooth
Impedance: 50 Ohm
Max power: 20 W
VSWR: <2.0
Gain: 0 dBi
Cable length: RG 174 2500 mm FME/F
Dimensions in mm: 74 x 80 x 13

Technical data GPS

Center frequency: 1575.42MHz
Band width: ± 1 MHz
Impedance: 50 Ohm
Current consumption: 20 mA max
Power gain: 27 dBi
Noise figure: 1.2 dBi
GPS System gain: < 24dBi
(2.5m RG174, 2.85V, 2 connectors)
Supply voltage: 2.7 – 5.5 volts
Temperature -40° C to +90° C

This very low profile antenna comes with high gain and low VSWR. It will give you superior performance at a low price. The flat design protects against vandalism.

Application examples

- On roof of trucks or cars
- On roof of busses

Other antenna connectors upon request.

Roof Antenna Penta Band 900/1800/1900/UMTS ANT-GXR603-FME/F –SMA/M

Roof antenna multi band including 5000 mm RG 58 cable for use in wireless communication.



Technical data GSM / UMTS

Frequency range:
GSM 900: 824 - 960 MHz
GSM 1800:1710 - 1880 MHz
UMTS: 1900 - 2170 MHz
Impedance: 50 Ohm
Max power: 100 W
Rod length: 35 mm
Gain: 0 dBi
Return loss: < 2
Cable length: RG 58 4250 mm with FME female
Polarization: Vertical
Dimensions: 67 x 29 mm
Temperature: -40 – 80 °C

Other antenna connectors upon request.

Roof Antenna Single Band TETRA ANT-SXR6609-FME/F

Low profile roof antenna dual band for wireless communication with 2500 mm cable RG 174.



Technical data GSM / UMTS

Frequency range:
Tetra: 380 - 500 MHz
Impedance: 50 Ohm
Max power: 50 W
VSWR: <2.0
Gain: 2.2 dBi
Cable length: RG 174 2500 mm FME/F
Dimensions in mm: 74 x 80 x 13

This very low profile antenna comes with high gain and low VSWR. It will give you superior performance at a low price. The flat design protects against vandalism.

Application examples

- On roof of trucks or cars
- On roof of busses

Other antenna connectors upon request.

Roof Antenna Tri Band 900/1800/1900 ANT-GXR103-FME/F –SMA/M

Roof antenna multi band including 5000 mm RG 58 cable for use in wireless communication.



Technical data GSM / UMTS

Frequency range:
GSM 900: 880 - 960 MHz
GSM 1800:1710 - 1880 MHz
UMTS: 1900 - 2170 MHz
Impedance: 50 Ohm
Max power: 30 W
Rod section: 1
Rod length: 35 mm
Gain: 2.2 dBi
Return loss: < 1.5
Wave: 1/4 + 1/4 lambda
Cable length: RG 58 5000 mm with FME female
Polarization: Vertical
Rod length: 60 mm

Other antenna connectors upon request.

Roof Antenna Multi Band 900/1800/1900/UMTS/ WLAN/BT/GPS ANT-GNAR6605-FME/F-SMA/M

Multi band roof antenna with built-in passive diplexer including 3x 5m RG174 extension cables for use in wireless communication and broadcast radio.



Body mount GSM-R Antenna Single Band 876-925 ANT-GXR6607-N

Low profile, GSM-R optimised antenna. Extra narrow bandwidth for protection against interferences with other GSM bands. Optimised for horizontal radiation.





Technical data GSM / UMTS / BT

Frequency range:
GSM 850 / 900: 824 - 960 MHz
GSM 1800/1900/UMTS:1710 - 2170 MHz
Bluetooth/WLAN: 2400 MHz
Impedance: 50 Ohm
Gain: 2.2 dBi
Extension cable length: 5m RG174 with FME female
Dimensions in mm: 92 x 52 x 480
Temperature-40° C to +85° C

Technical data GPS

Center frequency GPS: 1575.42 MHz
Band width: ± 1,023 MHz
VSWR: 1.2 max
Impedance: 50 Ohm
Current consumption: 15 - 25 mA
Power gain: 26 - 28 dBi
Noise figure: 1.15 dB
Supply voltage: 2.7 – 5.5 volts
Cable length: 5m RG174 with SMA male

Broadcast radio AM/FM

Voltage supply: 12 – 15V
Gain FM: 5 – 10dBi
Cable length: 5m RG174
Connector: upon request (DIN, ISO)

Other antenna connectors and cable length/type on request.

Technical data GSM-R

Frequency range:
Uplink: 876 - 880MHz
Downlink: 921 - 925 MHz
Bandwith: 50 Mhz
Impedance: 50 Ohm
Max power: 20 W
VSWR: < 2.5
Gain: 2.2 dBi
Connector: N-type
Dimensions in mm: 74 x 80 x 13
Temperature-40° C to +85° C

This very low profile antenna comes with high gain and low VSWR. It will give you superior performance at a low price. The flat design protects against vandalism.

Application examples

Information displays at train stations



Other GSM-R antennas upon request. Please ask for detailed datasheet.

Inside Glass Multi Band / 3-Ports Antenna: 1st 900/1800/1900/UMTS 2n GPS 3rd WLAN/WIFI ANT-GNBW6602



Multi inside glass antenna which can be mounted on any surface. It provides three 5m extension cables for use GSM ,GPS and WLAN.

Technical data GSM / UMTS

Frequency range:
GSM 850 / 900: 824 - 960 MHz
GSM1800/1900/UMTS 1710 - 2170 MHz
Impedance: 50 Ohm
Max power: 20 W
Max power: > 12 dB
Gain: 2.2 dBi
Extension cable length: 5m with FME/F
Dimensions in mm: 77 x 34 x 13

Technical data GPS

Center frequency: 1575.42 MHz
Band width: ± 1,023 MHz
VSWR: 2.0 max
Impedance: 50 Ohm
Current consumption: 15 - 20 mA
Power gain: 27 dBi
Noise figure: 1.8 – 2.2 dB max.
Supply voltage: 2.8 – 5.5 volts
Temperature-40° C to +85° C
Cable length: 5m with SMA male

Technical data WLAN

WIFI 2.4 GHZ,
Cable length: 5m with SMA male-RP
Impedance: 50 Ohm

Other antenna connectors and cable length upon request. on request.

Roof Antenna/3-Ports Antenna 1st 850/900/1800/1900/UMTS/ 2nd GPS 3rd WLAN/WIFI ANT-GNBR6601

Low profile roof antenna multi band for wireless communication with 2500 mm



RG 174 cable.

Technical data GSM / UMTS

Frequency range:
GSM 850 / 900: 824 - 960 MHz
GSM 1800/1900/UMTS:1710 - 2170 MHz
Impedance: 50 Ohm
Max power: 20 W
VSWR: < 2
Gain: 0 dBi
Cable length: 2.5m FME/F
Dimensions in mm: 75 x 80 x 13

Technical data GPS

Center frequency: 1575.42 MHz
Band width: ± 1,023 MHz
VSWR: 2.0 max
Impedance: 50 Ohm
Current consumption: 15 - 20 mA
Power gain: 27 ± 1 dBi min
Noise figure: 1.8 – 2.2 dB max.
Supply voltage: 2.8 to 5.5 V
Temperature-40° C to +85° C
Cable length: 2.5m with SMA/M

Technical data WLAN

WIFI 2.4 GHZ,
Cable length: 2.5m with SMA male-RP
Impedance: 50 Ohm

Other antenna connectors and cable length upon request.

Roof Antenna Multi Band 900/1800/1900/UMTS/ WLAN/BT/GPS/GLONASS ANT-GNR6603-FME/F-SMA/M

Multi band roof antenna with built-in passive diplexer including two 5m RG174 extension cables for use in wireless communication.



(Successor of ANT-GNR100)

Technical data GSM / UMTS / BT

Frequency range:
GSM 850 / 900: 824 - 960 MHz
GSM 1800/1900/UMTS:1710 - 2170 MHz
Bluetooth/WLAN: 2400 MHz
Impedance: 50 Ohm
Max power: 138 mW
Gain: 2.2 dBi
Extension cable length: 5m RG174 with FME female
Dimensions in mm: 91 x 52 x 48

Technical data GPS/GLONASS

Center frequency GPS: 1575.42 MHz
GLONASS: 1602 Mhz
Band width: ± 1,023 MHz
VSWR: 1.2 max
Impedance: 50 Ohm
Current consumption: 15 - 25 mA
Power gain: 26 - 28 dBi
Noise figure: 1.15 dB
Supply voltage: 2.7 – 5.5 volts
Temperature -40° C to +85° C
Cable length: 5m RG174 with SMA male

Other antenna connectors and cable length/type on request.

Roof Antenna Quad Band 850/ 900/1800/1900/UMTS/ Bluetooth/WLAN ANT-GXR623-FME/F

Low profile roof antenna multi band for wireless communication with 2500 mm RG 174 cable.



Technical data GSM / UMTS
Frequency range:
GSM 850 / 900: 824 - 960 MHz
GSM 1800:1710 - 1880 MHz
GSM 1900 / UMTS: 1900 - 2170 MHz
WIFI 2,4 GHZ, Bluetooth
Impedance: 50 Ohm
Max power: 20 W
VSWR: <1,15
Gain: 2.2 dBi
Cable length: RG 174 2500 mm with FME/F
Dimensions in mm: 74 x 80 x 13

This very low profile antenna comes with high gain and low VSWR. It will give you superior performance at a low price. The flat design protects against vandalism.


Application examples

- On roof of trucks or cars
- Vending machines
- Alarm boxes
- Remote metering
- Telemetry applications
- Public pay phones
- POS terminals

Other antenna connectors and cable length upon request.

Directive Outdoor Antenna Multi Band 900/1800 ANT-GXD1201-FME/F

(Successor of ANT-GXD105)
Directive mobile antenna including 5000 mm CO100 cable for use in fixed stations.

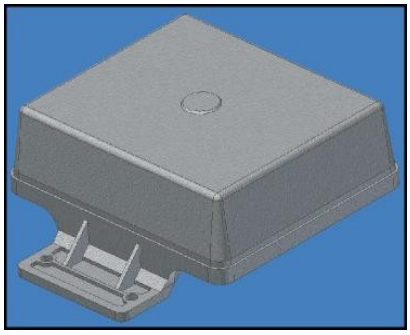

Technical data GSM

Frequency range:
GSM 900: 890 - 960 MHz
GSM 1800/1900: 1710-1990
UMTS: 1920 - 2170 MHz
VSWR: <1.5
Impedance: 50 Ohm
Polarization: vertical
Gain: 10 dBi
Cable length: CO100 5000 mm with FME Female

Dimensions in mm: 162 x 142 x 45
Temperature-30° C to +80° C
Wind recistance: max. 120 km/h

Other antenna connectors upon request.

Yagi Antenna Quad Band 850/900/1800/1900 ANT-GXD905-SMA/M

Directive mobile antenna including 2500 mm RG 58 cable for use in fixed stations.



Technical data GSM

Frequency range:
GSM 850/900: 824 - 960 MHz
GSM 1800/1900:1710 - 1990 MHz
Gain: 10 dBi
Connector: SMA male

Other antenna connectors upon request.

Omni-directional Outdoor Antenna Dual Band 900/1800 ANT-GXS106-FME/F (black) ANT-GXS107-FME/F (white rod)

Omni-directional antenna including 5000 mm RG 58 cable for use in fixed stations in boats, caravans and homes.



Technical data GSM

Frequency range:
GSM 850/900: 824 - 960 MHz
GSM 1800/1900:1710 - 1990 MHz
VSWR 824 - 960: < 2.0
VSWR 1710 - 1990: < 1.5
Impedance: 50 Ohm
Max power: 20 W
Gain: 2.2 dBi
Wave: 1/4 lambda
Cable length: RG 58 mm 5000 with FME/Female
Polarization: Vertical
Rod length: 250 mm

Other antenna connectors upon request.

Omni-directional Outdoor Antenna 850/900/1800/1900/ UMTS/Bluetooth/WLAN ANT-GXS108-FME/F

Omni-directional antenna including 5000 mm RG 58 cable for use in fixed stations in boats, caravans and homes.



Technical data GSM / UMTS

Frequency range:
GSM 850/900: 824 - 960 MHz
GSM 1800/1900:1710 - 1990 MHz
UMTS: 1900 - 2170 MHz
VSWR 824 - 960: < 2.0
VSWR 1710 - 1990: < 1.5
VSWR 1900 - 2170: < 2.0
Impedance: 50 Ohm
Max power: 10 W
Gain: 2.2 dBi
Cable length: RG 58 5000 mm with FME female
Polarization: Vertical
Rod length: 240 mm

Other antenna connectors upon request.

Omni-directional Outdoor Antenna 850/900/1800/1900/UMTS/ Bluetooth/WLAN ANT-GXS606-FME/F

Omni-directional antenna for outdoor (water protected) including cable for use in fixed stations in boats, caravans and homes.



Technical data GSM / UMTS

Frequency range:
GSM 850/900: 824 - 960 MHz
GSM 1800/1900:1710 - 1990 MHz
UMTS: 1900 - 2170 MHz
WIFI and Bluetooth
UMTS/ Bluetooth / WLAN 2,4 GHz
Impedance: 50 Ohm
Max power: 100 W
VSWR: 2.0 max.
Gain: 2.2 dBi
Polarization: Vertical
Cable: 5000 mm RG58 and connector FME/F
Rod length: 298 mm

Other antenna connectors upon request.

Waterproofed Antenna Multi Band 433/850/900/1800/ 1900/UMTS/WLAN ANT-GXS404-FME/F

Antenna multi band including 2000 mm RG 174 cable for use in wireless communication.



Technical data GSM

Frequency range:
ISM band: 433 MHz
GSM 900: 824 - 960 MHz
GSM 1800/1900:1710 - 1990 MHz
UMTS: 1900 - 2170 MHz Bluetooth / WLAN 2,4 GHz
Impedance: 50 Ohm
Max power: 10 W
VSWR: 2
Peak gain: 2.0 dBi
Cable length: RG174 2000 mm with FME female right angle
Dimensions in mm: 110 x 21 x 3

Special PCB antenna with covered waterproofed plastic enclosure.

Application examples

- Vending machines
- Alarm boxes
- Remote metering
- Telemetry applications
- Vehicle tracking

Other antenna connectors upon request.

Roof WLAN Antenna Tri Band 2400/5000/5900 ANT-BXR6610-SMA/M-RP

Bluetooth/WIFI/WLAN antenna tri band including 2500 mm RG 174 cable for use in wireless communication.



Technical data


Frequency range:
ISM2400: BT/WLAN 2400 MHz
ISM5000: WLAN 5000 MHz
ISM5900: WLAN 5900 MHz

Impedance: 50 Ohm
Polarization: horizontal
VSWR: < 2.0 @ 5 – 5.8 GHz
VSWR: < 1.5 @ 2.4 GHz
Gain: 5 dBi
Cable length: RG 174 2500 mm with SMA male
Dimensions in mm: 70 x 15
Temperature: -40 - +85°C

Other antenna connectors upon request.

PCB WLAN Antenna Single Band 2400 ANT-BXP6611-UFL

Dedicated WLAN/WIFI/Bluetooth PCB antenna single band for best VSWR including 60 mm RG174 cable for use in wireless communication.

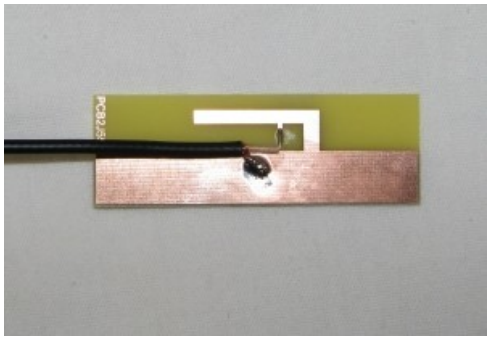

Technical data

Frequency range:
ISM2400: 2400 MHz

Impedance: 50 Ohm
VSWR: < 1.5
Gain: 3 dBi
Size of PCB: 62 mm x 21 mm
Cable length: RG 174 60 mm with U.FL

Special PCB antenna for use inside plastic casing. To get the best radiation, the casing should be made of plastic. The casing should NEVER contain carbon. The minimum distance to metal components should be 40 mm. You will get the best performance using a distance of 80 mm.

Application examples

- Vending machines
- Alarm boxes
- Remote metering
- Telemetry applications
- Public payphones
- POS terminals

Other antenna connectors upon request.

Omni directional WLAN Outdoor Antenna Single Band 2400 ANT-BXS6612-SMA/M-RP

PCB antenna single band including 2500 mm RG58 cable for use in wireless communication.



Technical data

Frequency range:
ISM 2400: 2400 MHz

Impedance: 50 Ohm
Max power: 20 W
VSWR: < 2
Polarization: vertical
Gain: 5 dBi
Cable length: RG58 2500 mm with SMA male

Dimensions in mm:122 x 16
Temperature: -40 - +85°C

Other antenna connectors upon request.

Directive WLAN Outdoor Antenna Tri Band 2400/5000/5900 ANT-BXD6613-N/F

Directional antenna tri band including 2500 mm RG58 cable for use in wireless communication.



Technical data

Frequency range:
ISM 2400: 2400 MHz
ISM 5000: 5000 MHz
ISM 5900: 5900 MHz

Impedance: 50 Ohm
Gain: 12 dBi
Beam horizontal: 40°
Beam vertical: 30°
Polarization: depends on mounting

Dimensions in mm: 104 x 104x 90
Temperature: -40 - +85°C

Other antenna connectors upon request.

PCB Antenna Quad Band 850/900/1800/1900 UMTS/Bluetooth ANT-GXP114-MMCX/M



Technical data GSM

Frequency range:
GSM 850/900: 824 - 960 MHz
GSM 1800/1900:1710 - 1990 MHz
UMTS 2,1GHz/Bluetooth 2,4GHz
Gain: 2.2dBi
VSWR : <1.5/2
Impedance: 50 Ohm
Max Power: 25W
Polarization: Vertical
Connector: MMCX/M
Size: 22 x 62 mm

Special PCB antenna for use inside plastic casing. To get the best radiation, the casing should be made of plastic. The casing should NEVER contain carbon. The minimum distance to metal components should be 40 mm. You will get the best performance using a distance of 80 mm.

Application examples

- Vending machines
- Alarm boxes
- Remote metering
- Telemetry applications
- Public payphones
- POS terminals

PCB Antenna Tri Band 900/1800/1900 ANT-GXP401-MMCX/M

PCB antenna tri band including 160 mm RG178 cable for use in wireless communication.



Technical data GSM

Frequency range:
GSM 900: 824 - 960 MHz
GSM 1800:1710 - 1990 MHz
Impedance: 50 Ohm
Max power: 10 W
Return loss: -7,5 db
Peak gain: 1,0 dBi
Size of PCB: 82 mm x 21 mm
Cable length: RG 178 160 mm with MMCX male right angle
Dimensions of PCB in mm: 82 x 21
Special PCB antenna for use inside plastic casing. To get the best radiation, the casing should be made of plastic. The casing should NEVER contain carbon. The minimum distance to metal components should be 40 mm. You will get the best performance using a distance of 80 mm.

Application examples

- Vending machines
- Alarm boxes
- Remote metering
- Telemetry applications
- Public payphones
- POS terminals

Other antenna connectors upon request.

PCB Antenna Quad Band 850/900/1800/1900 UMTS/Bluetooth ANT-GXP115-MMCX/M



Technical data GSM


Frequency range:
GSM 850/900: 824 - 960 MHz
GSM 1800/1900:1710 - 1990 MHz
UMTS 2,1GHz/Bluetooth 2,4GHz
Gain: 2.2dBi
VSWR :
900MHz <1.5 1800MHz <1,2
2100MHz < 1.5 2400MHz < 2.0
Impedance: 50 Ohm
Max Power: 25W
Polarization: Vertical
Connector: MMCX/M
Size: 42 x 16 x 1,6 mm

Special PCB antenna for use inside plastic casing. To get the best radiation, the casing should be made of plastic. The casing should NEVER contain carbon. The minimum distance to metal components should be 40 mm. You will get the best performance using a distance of 80 mm.

Application examples

- Vending machines
- Alarm boxes
- Remote metering
- Telemetry applications
- Public payphones
- POS terminals

PCB Antenna Quad Band 850/900/1800/1900 UMTS/Bluetooth ANT-GXP116-MMCX/M

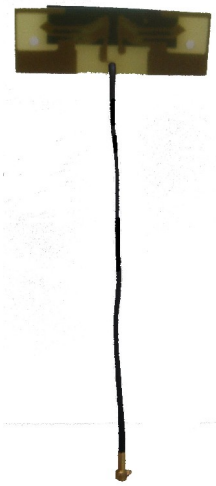

Technical data GSM

Frequency range:
GSM 850/900: 824 - 960 MHz
GSM 1800/1900:1710 - 1990 MHz
UMTS 2,1GHz/Bluetooth 2,4GHz
Gain: 2.2dBi
VSWR : <1.5/2
Impedance: 50 Ohm
Max Power: 25W
Polarization: Vertical
Connector: MMCX/M
Size: 25 x 75 mm

Special PCB antenna for use inside plastic casing. To get the best radiation, the casing should be made of plastic. The casing should NEVER contain carbon. The minimum distance to metal components should be 40 mm. You will get the best performance using a distance of 80 mm.

Application examples

- Vending machines
- Alarm boxes
- Remote metering
- Telemetry applications
- Public payphones
- POS terminals

PCB Antenna Quad Band
850/900/1800/1900
UMTS/Bluetooth
ANT-GXP117-MMCX/M



Technical data GSM

Frequency range:
GSM 850/900: 824 - 960 MHz
GSM 1800/1900:1710 - 1990 MHz
UMTS 2,1GHz/Bluetooth 2,4GHz
Gain: 2.2dBi
VSWR :
Impedance: 50 Ohm
Max Power: 25W
Polarization: Vertical
Connector: MMCX/M
Size: 68 x 46

Special PCB antenna for use inside plastic casing. To get the best radiation, the casing should be made of plastic. The casing should NEVER contain carbon. The minimum distance to metal components should be 40 mm. You will get the best performance using a distance of 80 mm.

Application examples

- Vending machines
- Alarm boxes
- Remote metering
- Telemetry applications
- Public payphones
- POS terminals

Helical Antenna Dual Band 900/1800
ANT-GXR201-MMCX/M

Helical antenna dual band for use in wireless communication. This antenna is used in wireless payphones and is also perfect for security applications and metering.



Top view



Back view



On top of a small plastic case



Inside plastic case

Technical data GSM

Frequency range:
GSM 900: 890 - 960 MHz
GSM 1800:1710 - 1880 MHz
Gain: 2.2dBi
VSWR: <=3
Nominal: Impedance 50 Ohm
Polarization: Vertical or Horizontal
Max power: 25 W
Connector MMCX Male or customisation
Weight: 22 g
Cable length: 350 mm +/- 50 mm
Connector: MMCX right angle
Dimensions in mm: 50 x 43 x 20

This very small helical antenna comes with high gain and low VSWR. It will give you superior performance at a low price. Additionally you will save money since it comes with an MMCX connector (other connectors on request).
If you use a rubber plate between your plastic casing and this antenna you can reach a higher IP class due to protection against water and dust. The flat design protects against vandalism.

Please note that this antenna should not mount on a metal enclosure. The plastic is not UV light resident. For outdoor use we recommend to use the flat antenna ANT-GXR623, because it is resident against UV light.

Application examples


- Vending machines
- Alarm boxes
- Remote metering
- Telemetry applications
- Public payphones
- POS terminals

ANT-GXR201-SMA/M 350mm +/- 50mm cable, connector SMA male

Other antenna connectors upon request.

Draft of Helical Antenna GSM 900/1800 ANT-GXR201-MMCX/M and ANT-GXR211-MMCX/M

Helical antenna dual band for use in wireless communication. This antenna is used in wireless payphones and is also perfect for security applications and metering.

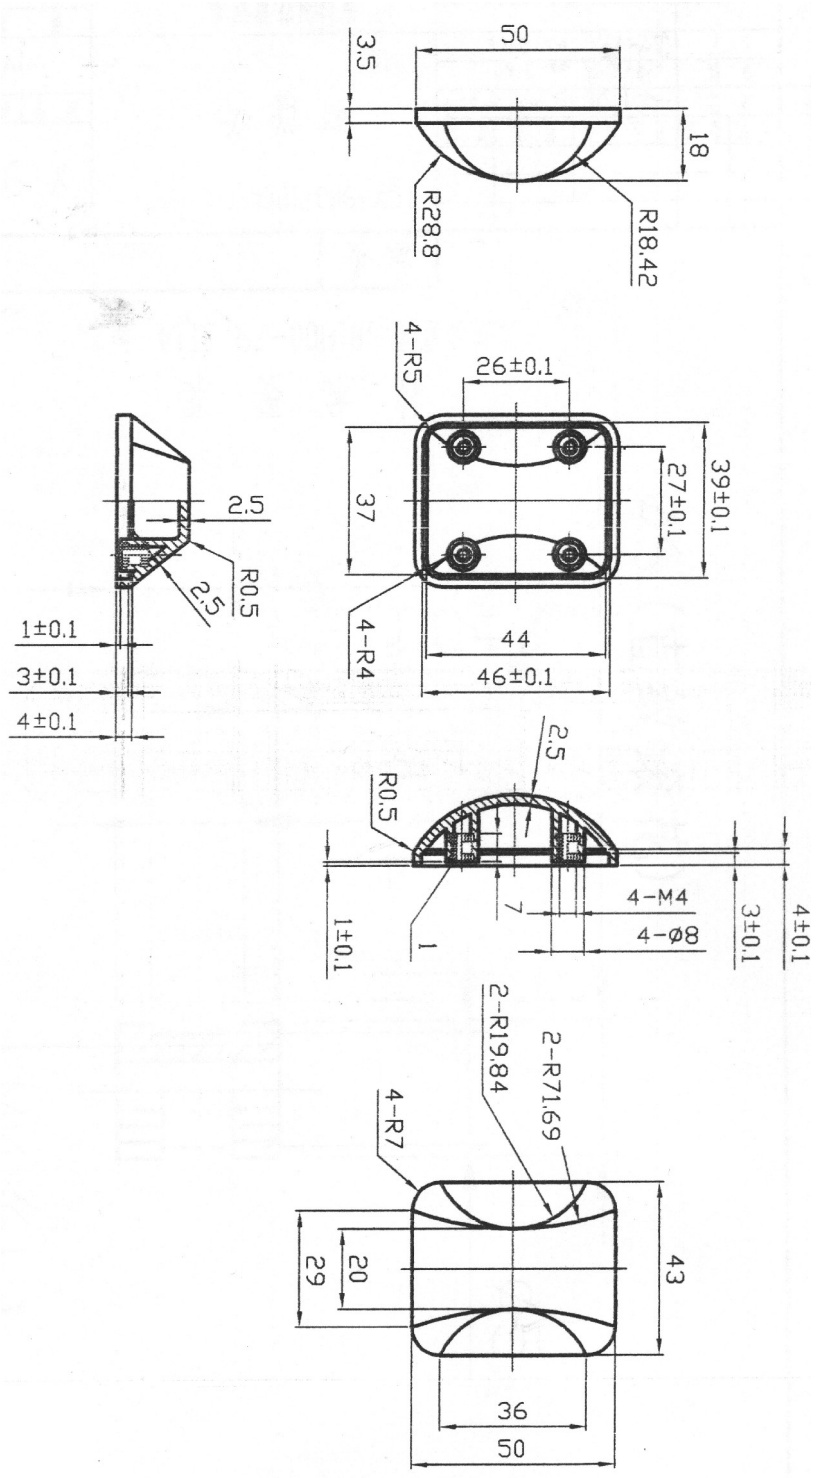

Helical Antenna Tri Band 900/1800/1900 ANT-GXR203-MMCX/M

Helical antenna Tri band for use in wireless communication. This antenna is used in wireless payphones and is also perfect for security applications and metering.



Technical data GSM

Frequency range:
GSM 900: 890 - 960 MHz
GSM 1800/1900:1710 - 1990 MHz
Gain 2.2dBi
VSWR A: <=1,6 B: <=2,5
Impedance 50 Ohm
Polarization: Vertical
Max Power: 50 W
Connector: MMCX Male or customisation
Weight: 50 g
Cable length: 400 mm +/-50 mm
Connector: MMCX right angle
Rod length: 90 mm

This helical antenna comes with high gain and very low VSWR and will give you best performance at a low price. The antenna is inexpensive and comes with a connector cable. RF connectors on request.
If you use a rubber plate between your plastic casing and this antenna then you can reach a higher IP class due to protection against water and dust.

ANT-GXR203-SMA/M 400 mm +-50 mm, connector SMA Male

Other antenna connectors upon request.

Portable Antenna Quad Band 850/900/1800/1900 ANT-GXH914-SMA/M

Quad band for use in wireless communication. This antenna can be connected to a SMA bulk head or SMA panel mount in your casing. See also RF cables with SMA bulk head.



Technical data GSM

Frequency range:
GSM 850/900: 824 - 960 MHz
GSM 1800/1900:1710 - 1990 MHz
Gain 1.5 dBi
VSWR A: <=2.0
Impedance: 50 Ohm
Polarization: Vertical
Max Power: 50 W
Connector: SMA Male
Weight: 20 g
Rod length: 51 mm

Portable Antenna Quad Band 850/900/1800/1900 ANT-GXH915-SMA/M

Quad band for use in wireless communication. This antenna can be connected to a SMA bulk head or SMA panel mount in your casing. See also RF cables with SMA bulkhead.



Technical data GSM

Frequency range:
GSM 850/900: 824 - 960 MHz
GSM 1800/1900:1710 - 1990 MHz
Gain: 1.5 dBi
VSWR A:<=2.0
Impedance: 50 Ohm
Polarization: Vertical
Max Power: 25W
Connector: SMA Male
Weight:20 g
Rod length: 60 mm

Portable Antenna Quad Band 850/900/1800/1900 ANT-GXH615-SMA/M

Quad band for use in wireless communication. This antenna can be connected to a SMA bulk head or SMA panel mount in your casing. See also RF cables with SMA bulk head.



Technical data GSM

Frequency range:
GSM 850/900: 824 - 960 MHz
GSM 1800/1900/:1710 - 1990 MHz
UMTS: 2100 MHz
WLAN/BT: 2400 MHz
Gain 2.2 dBi
VSWR: <=2
Impedance: 50 Ohm
Polarization: Vertical
Max Power: 50 W
Connector: SMA Male
Weight: 20 g
Dimensions: 55x9.65 mm
Operating temperature: -40 to +85°C

Portable Antenna Quad Band 850/900/1800/1900 ANT-GXH614-SMA/M

Quad band for use in wireless communication. This antenna can be connected to a SMA bulk head or SMA panel mount in your casing. See also RF cables with SMA bulkhead.



Technical data GSM

Frequency range:
GSM 850/900: 824 - 960 MHz
GSM 1800/1900:1710 - 1990 MHz
UMTS: 2100 MHz
WLAN/BT: 2400 MHz
Gain: 2.2 dBi
VSWR:<=2.0
Impedance: 50 Ohm
Polarization: Vertical
Max Power: 25W
Connector: SMA Male
Weight:20 g
Dimensions: 53x9.65 mm
Operating temperature: -40 to +85°C

Portable Antenna Multi Band 850/900/1800/1900/ UMTS/Bluetooth ANT-GXH616-FME/F

Quad band for use in wireless communication. This antenna can be connected to a FME head in your casing. Supports Bluetooth and UMTS.



Technical data

Frequency range:
GSM 850/900: 824 - 960 MHz
GSM 1800/1900:1710 - 1990 MHz
UMTS 2100 MHz
Bluetooth 2.4 GHz
Gain 2,2 dBi
VSWR A: <=2.0
Impedance: 50 Ohm
Polarization: Vertical
Max Power: 50 W
Connector: FME Female
Weight: 20 g
Rod length: 61 mm

Portable Antenna Multi Band 850/900/1800/1900/ UMTS/Bluetooth ANT GXH617-FME/F

Quad band for use in wireless communication. This antenna can be connected to a FME head in your casing. Supports Bluetooth and UMTS.



Technical data

Frequency range:
GSM 850/900: 824 - 960 MHz
GSM 1800/1900:1710 - 1990 MHz
UMTS 2100 MHz
Bluetooth 2.4 GHz
Gain: 2,2 dBi
VSWR A:<=2.0
Impedance: 50 Ohm
Polarization: Vertical
Max Power: 25W
Connector: FME Female
Weight:20 g
Rod length: 53 mm

Portable Antenna Multi Band 850/900/1800/1900/ UMTS/Bluetooth ANT-GXH6604-SMA/M

Multi band for use in wireless communication. This antenna can be connected to a SMA panel mount or bulk head in your casing. Supports Bluetooth and UMTS.




Technical data

Frequency range:
GSM 850/900: 824 - 960 MHz
GSM 1800/1900:1710 - 1990 MHz
UMTS: 2100 MHz
Bluetooth/WLAN: 2.4 GHz
Gain 2.2 dBi
VSWR: < 2.0
Impedance: 50 Ohm
Polarization: Vertical
Max Power: 50W
Connector: FME Female
Weight: 7g
Rod length: 54mm
Diameter: 9.65mm

Portable Antenna Multi Band 850/900/1800/1900 ANT-GXH911-SMA/M

Quad band for use in wireless communication. This antenna can be connected to a FME head in your casing. Supports Bluetooth and UMTS.

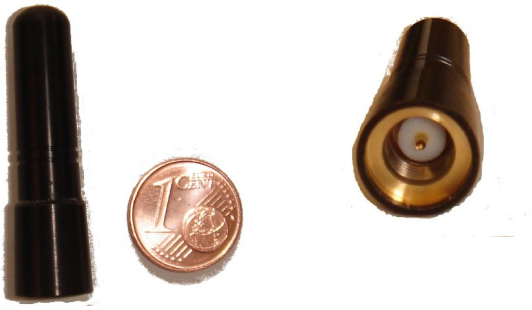

Technical data

Frequency range:
GSM 850/900: 824 - 960 MHz
GSM 1800/1900:1710 - 1990 MHz

Gain: 2.2dBi
VSWR < 2.0
Impedance: 50 Ohm
Polarization: Vertical
Max Power: 25W
Connector: SMA Male
Weight:6g
Rod length: 34 mm
Diameter: 7.8mm

Portable Antenna Multi Band 850/900/1800/1900/UMTS/Bluetooth ANT-GXH918-TNC/M

Multi band for use in wireless communication. Supports Bluetooth and UMTS.



Technical data

Frequency range:
GSM 850/900: 824 - 960 MHz
GSM 1800/1900:1710 - 1990 MHz
UMTS 2100 MHz
Bluetooth 2.4 GHz
Gain: 2,2 dBi
VSWR A:<=2.0
Impedance: 50 Ohm
Polarization: Vertical
Max Power: 25W
Connector: TNC Male
Weight: 20 g
Rod length: 61 mm

Portable Antenna Tri Band 900/1800/1900 ANT-GXH204-SMA/M

Tri band for use in wireless communication. This antenna can be connected to a SMA bulk head or SMA panel mount in your casing. See also RF cables with SMA bulk head.



Technical data GSM

Frequency range:
GSM 900: 890 - 960 MHz
GSM 1800/1900:1710 - 1990 MHz
Gain 2 dBi
Impedance: 50 Ohm
Polarization: Vertical
Max Power: 50 W
Connector: SMA Male
Weight: 20 g
Rod length: 44 mm

Portable Antenna Tri Band 900/1800/1900 ANT-GXH205-SMA/M

Dual band for use in wireless communication. This antenna can be connected to a SMA bulk head or SMA panel mount in your casing. See also RF cables with SMA bulkhead.



Technical data GSM

Frequency range:
GSM 900: 890 - 960 MHz
GSM 1800/1900:1710 - 1990 MHz
Gain: 3 dBi
Impedance: 50 Ohm
Polarization: Vertical
Max Power: 25W
Connector: SMA Male
Weight:30 g
Rod length: 75 mm

Portable Antenna Dual Band 900/1800 ANT-GXH254-FME/F

Dual band for use in wireless communication. This antenna can be connected to a FME bulk head or FME panel mount in your casing. See also RF cables with FME bulk head.



Technical data GSM

Frequency range:
GSM 900: 890 - 960 MHz
GSM 1800:1710 - 1880 MHz
Gain: 2.2dBi
VSWR : < 1: 2.0
Impedance: 50 Ohm
Polarization: Vertical
Connector: FME Female
Rod length: 50 mm

Portable Antenna Dual Band 900/1800 ANT-GXH255-FME/F

Dual band for use in wireless communication. This antenna can be connected to a FME bulk head or FME panel mount in your casing. See also RF cables with FME bulk head.



Technical data GSM

Frequency range:
GSM 900: 890 - 960 MHz
GSM 1800:1710 - 1880 MHz
Gain: 2.2dBi
VSWR : < 1: 2.0
Impedance: 50 Ohm
Polarization: Vertical
Connector: FME Female
Rod length: 46 mm

Portable Antenna Tri Band 900/1800/1900 ANT-GXH206-SMA/M

Triple band for use in wireless communication. This antenna can be connected to a SMA bulk head or SMA panel mount in your casing. See also RF cables with SMA bulk head.



Technical data GSM

Frequency range:
GSM 900: 890 - 960 MHz
GSM 1800/1900 : 1710 - 1990 MHz
Gain: 2.2 dBi
VSWR: <2.0 B
Nominal Impedance: 50 Ohm
Polarization: Vertical
Max Power: 50 W
Connector: SMA Male
Weight: 50 g
Rod length: 210 mm

Portable Antenna Dual Band 900/1800 ANT-GXH902-FME/F

Dual band for use in wireless communication. This antenna can be connected to a FME bulk head or SMA panel mount in your casing. See also RF cables with FMA bulk head.



Technical data GSM

Frequency range:
GSM 900: 890 - 960 MHz
GSM 1800:1710 - 1880 MHz
Gain: 2.2dBi
VSWR : < 2
Impedance: 50 Ohm
Polarization: Vertical
Max Power: 25 W
Connector: FME Female
Weight: 8g
Rod length: 92 mm

Portable Antenna Dual Band 900/1800 ANT-GXH111-SMA/M

Omni-directional antenna with SMA connector.




Technical data GSM

Frequency range:
GSM 900: 890 - 960 MHz
GSM 1800:1710 - 1880 MHz
VSWR < 2
Impedance: 50 Ohm
Max power: 50 W
Gain: 2.2 dBi
Polarization: Vertical
Connector: SMA male
Rod length: 62 mm

Ultra Small Antenna Quad Band GSM 850/900/1800/1900/UMTS ANT-GXE474

High efficiency Multi Band ceramic antenna for assembling on PCB

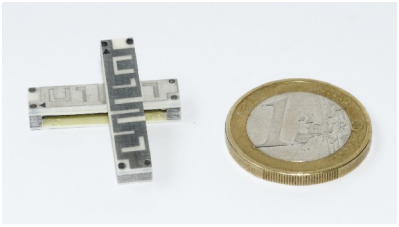

Technical data GSM

GSM 800/900: 824 - 960 MHz
GSM 1800 / 1900: 1710 - 1990 MHz
UMTS: 2110 – 2170 MHz
Impedance: 50 Ohm
Gain: 1.5 – 3.5 dBi
VSWR: < 3.0 max. depends on environment
Efficiency: >50%
Polarization: Linear
Dimensions in mm: 24 x 5.5 x 4.4
Operating Temperature: -35 to 85°C

Special Ultra Slim antenna for assembling on your PCB.

Application examples

- Automotive
- PDAs
- People tracking devices
- Small telemetry boxes
- PCMCA cards
- Mobile phones

For more information please ask for the detailed datasheet.

Please ask for the assembling guideline, before you start with implementation of this antenna on your PCB.

This *"GXE antenna"* has to be customised on the ground plane and the enclosure of the application. Please ask for this process before your order.

Ultra Slim Antenna Penta Band GSM 850/900/1800/1900/UMTS ANT-GXE3301

Multi Band ceramic antenna for assembling on PCB

(original size)

Technical data GSM

GSM 800/900: 824 - 960 MHz
GSM 1800 / 1900: 1710 - 1990 MHz
UMTS: 2110 – 2170 MHz
Impedance: 50 Ohm
Gain: 1.5 – 4.6 dBi
VSWR: < 3.3 max. depends on environment
Polarization: Linear
Dimensions in mm: 35 x 6 x 5

Special Ultra Slim antenna for assembling on your PCB.

Application examples

- Point of sales terminals
- PDAs
- People tracking devices
- Small telemetry boxes
- PCMCA cards
- Mobile phones


Starter kit STK-GXE3301

Please ask for the assembling guideline, before you start with implementation of this antenna on your PCB.

This *"GXE antenna"* has to be customised on the ground plane and the enclosure of the application. Please ask for this process before your order.

Ultra Slim Antenna Tri Band GSM 900 /1800/1900 ANT-GXE477

Special Ultra Slim antenna for assembling on your PCB

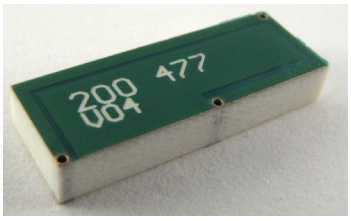

Technical data GSM

Frequency range:
GSM 850: 824 – 894 MHz
SWR 2:1 Gain 0 dBi
GSM 900: 880 – 960 MHz,
VSWR 2:1 Gain 0 dBi
GSM 1800: 1710 – 1880 MHz,
VSWR 2:1, Gain 1 dBi
GSM 1900: 1850 – 1990 MHz, VSWR 2:1, Gain 1 dBi
Dimensions in mm: 20.5 x 7 x 3.2

Application examples

- PDAs
- People tracking devices
- Small telemetry boxes
- PCMCA cards
- Mobile phones

This SMT Antenna will be delivered "Tape and Reel".
It can be used as a triband GSM 900 / 1800 / 1900 or as a GSM 850 / 1800 / 1900 with matching circuit.

Starter Kit STK-GXE477

This *"GXE antenna"* has to be customised on the ground plane and the enclosure of the application. Please ask for this process before your order.

Ultra Slim Antenna Tri Band GSM 900/1800/1900 ANT-GXE475

Multi Band ceramic antenna for assembling on PCB



(original size)

Technical data GSM

GSM 900: 880 - 960 MHz
GSM 1800 / 1900: 1710 - 1990 MHz
Impedance: 50 Ohm
Gain: 2.2 dBi
VSWR: 2,5 max. depends on environment
Polarization: Linear
Dimensions in mm: 30 x 6 x 5

Special Ultra Slim antenna for assembling on your PCB.

Application examples

- Point of sales terminals
- PDAs
- People tracking devices
- Small telemetry boxes
- PCMCA cards
- Mobile phones

Starter kit STK-GXE475

Please ask for the assembling guideline, before you start with implementation of this antenna on your PCB.

This *"GXE antenna"* has to be customised on the ground plane and the enclosure of the application. Please ask for this process before your order.

Ultra Slim Antenna Multi Band GSM 900/1800/1900/UMTS ANT-GXE476

Multi Band antenna for assembling on PCB



(original size)

Technical data GSM / UMTS

GSM 900: 880 - 960 MHz
GSM 1800 / 1900 /UMTS: 1710-2170 MHz
Quad band GSM 850 band is attainable with appropriate matching circuit design
Impedance: 50 Ohm
Gain: 2.2 dBi
VSWR: 3 max. depends on environment
Polarization: Linear
Dimensions in mm: 31 x 6 x 3.3

Special Ultra Slim antenna for assembling on your PCB.

Application examples

- Point of sales terminals
- PDAs
- People tracking devices
- Small telemetry boxes
- PCMCA cards
- Mobile phones

Starter kit STK-GXE476

Please ask for the assembling guideline, before you start with implementation of this antenna on your PCB.

This *"GXE antenna"* has to be customised on the ground plane and the enclosure of the application. Please ask for this process before your order.

Ultra Slim Antenna Bluetooth ANT-BXE480

Ceramic antenna for assembling on PCB



(original size)

Technical data Bluetooth

Bluetooth: 2400 - 2484 MHz
Impedance: 50 Ohm
Gain: 1.5 dBi
VSWR: 2 max. depends on environment
Polarization: Linear
Dimensions in mm: 10 x 4 x 3

Special Ultra Slim antenna for assembling on your PCB.

Application examples

- Point of sales terminals
- PDAs
- People tracking devices
- Small telemetry boxes
- Mobile phones

Please ask for the assembling guideline, before you start with implementation of this antenna on your PCB.

Ultra Slim Antenna GPS ANT-GXE490

Ceramic antenna for assembling on PCB



(original size)

Technical data GPS

GPS: 1575.42 MHz
Impedance: 50 Ohm
Gain: 0 dBi
VSWR: 2
Polarization: Linear
Dimensions in mm: 10 x 4 x 3

Special Ultra Slim antenna for assembling on your PCB.

Application examples

- Point of sales terminals
- PDAs
- People tracking devices
- Mobile phones

Please ask for the assembling guideline, before you start with implementation of this antenna on your PCB.

PCB Antenna Quad Band 850/900/1800/1900 ANT-GXE479-GSC



Technical data GSM


Frequency range:
GSM 850/900: 824 - 960 MHz
GSM 1800/1900:1710 - 1990 MHz
Gain: 0 dBi
VSWR : < 2.0
Impedance: 50 Ohm
Polarization: Linear
Connector: GSC
Size: 34 x 7 mm
Cable length: 100 mm +/5mm

This *"GXE antenna"* has to be customised on the ground plane and the enclosure of the application. Please ask for this process before your order

ANT-GXE479-MMCX/M version with connector MMCX/M

Helical Antenna ISM Band 868 MHz ANT-IXE902

Helical antenna for assembling on PCB

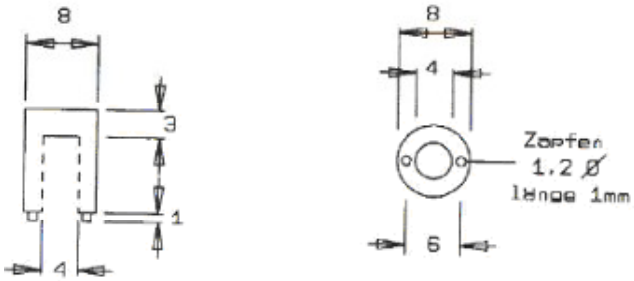

Technical data ISM 868

ISM band: 868 MHz +/- 10 MHz
Impedance: 50 Ohm
Gain: 2.2 dBi
VSWR: 1,13
Polarization: Linear
Dimensions in mm: 8 x 10

Special small antenna for assembling on your PCB.

Application examples


- Point of sales terminals
- PDAs
- Metering systems

Please ask for the assembling guideline, before you start with implementation of this antenna on your PCB.

Center frequency and bandwidth can be changed on customer specification.

Helical Antenna ISM Band 868 MHz ANT-IXE903

Ultra slim PCB antenna for assembling on PCB

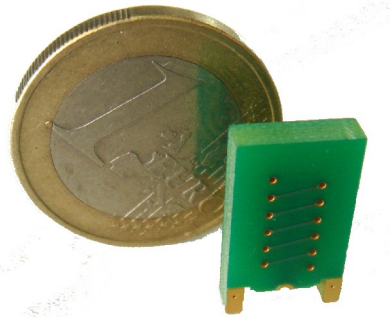

Technical data ISM 868

ISM band: 863 - 873 MHz
Impedance: 50 Ohm
Gain: 0 dBi
VSWR: < 2
Polarization: Vertical
Dimensions in mm: 10 x 17 mm

Special small antenna for assembling on your PCB.

Application examples


- Point of sales terminals
- PDAs
- Metering systems

Please ask for the assembling guideline, before you start with implementation of this antenna on your PCB.

Center frequency and bandwidth can be changed on customer specification.

Cable CAB-FME/F500FME/M

RF cable FME/F, x mm RG 58 RF cable, FME/M bulkhead, CAB-FME/F500FME/M (5000 mm cable), other length on request

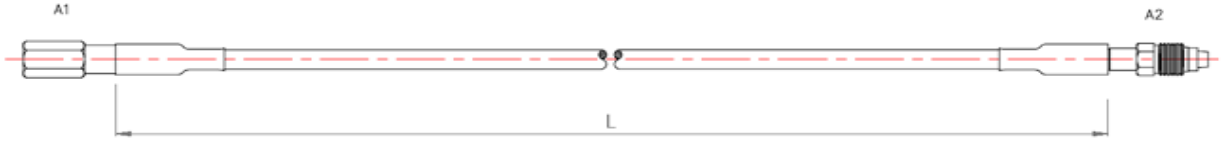


Cable CAB-FME/F500SMA/M

RF cable FME/F, x mm RG 174, SMA/M, CAB-FME/F500SMA/M bulkhead, (5000 mm cable), other length on request




Cable CAB-RFR501-X MMCX/M to FME/M bulkhead

RF cable MMCX/M right angle, x mm RG 174, FME/M bulkhead, CAB-RFR501-100 (100 mm cable), CAB-RFR501-200 (200 mm cable), other length on request

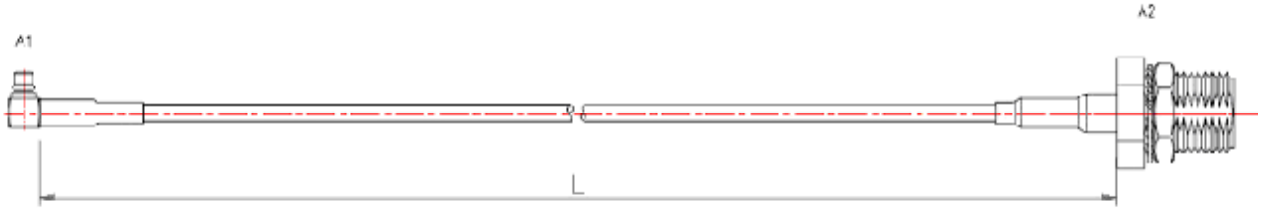


Cable CAB-RFR502-X MMCX/M to FME/M

RF cable MMCX/M right angle, x mm RG 174, FME/M, CAB-RFR502-100 (100 mm cable), CAB-RFR502-200 (200 mm cable), other length on request

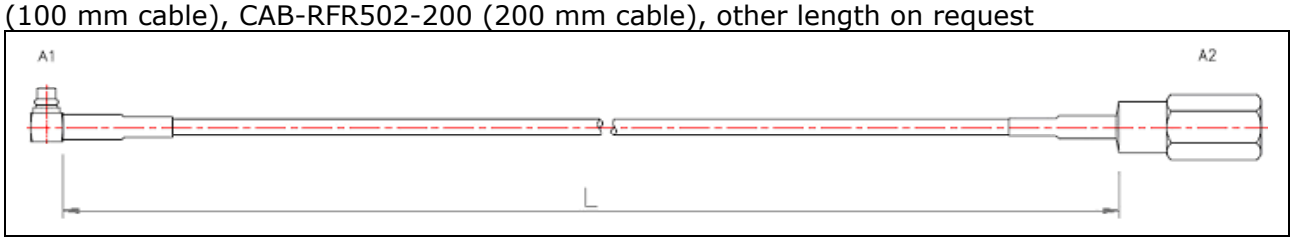

Cable CAB-RFR503-X MMCX/M to SMA/F bulkhead

RF cable MMCX/M right angle, x mm RG 174, SMA/F bulkhead, CAB-RFR503-150 (150 mm cable), CAB-RFR503-200 (200 mm cable), other length on request

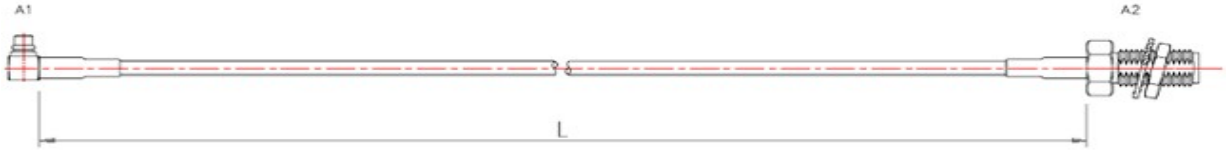


Cable CAB-RFR505-X MMCX/M to slim FME/M bulkhead

RF cable MMCX/M right angle, x mm RG 174 and RG178, slim FME/M bulkhead, CAB-RFR505-135 (135 mm cable), CAB-RFR505-200 (200 mm cable), other length on request



Slim FME bulkhead:

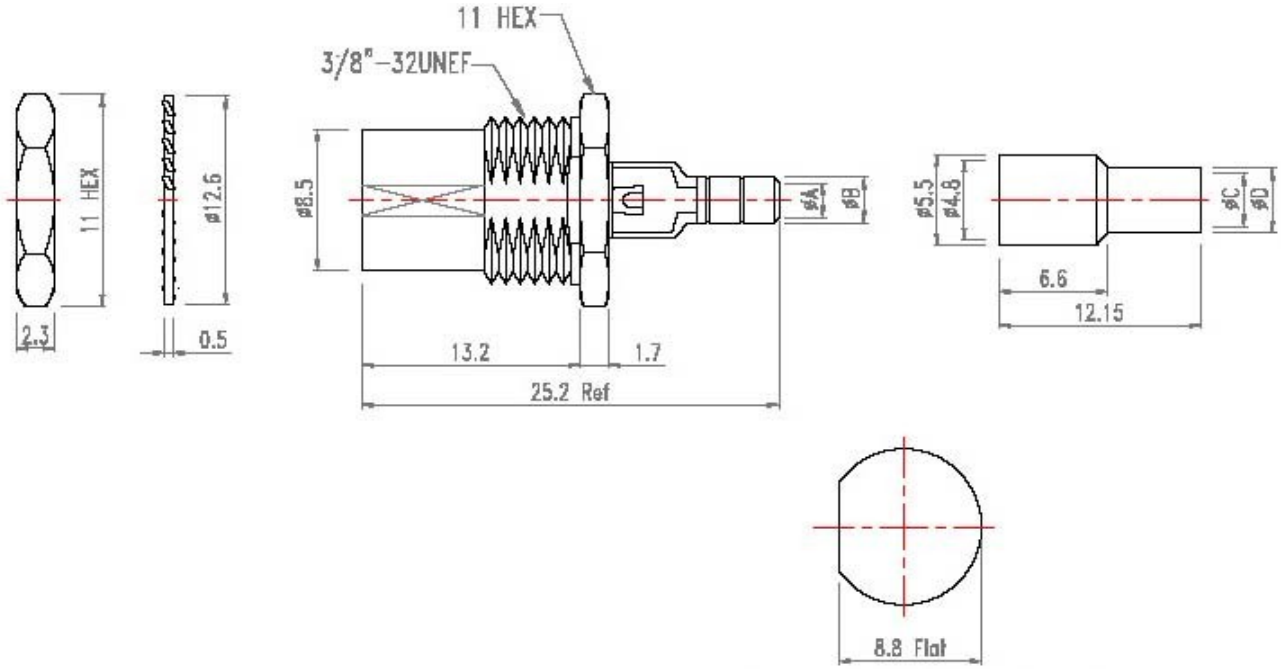

Cable CAB-RFR506-X MMCX/M to SMA/F bulkhead

RF cable MMCX/M right angle, x mm RG 178, SMA/F bulkhead, CAB-RFR506-100 (100 mm cable), CAB-RFR506-200 (200 mm cable), other length on request



Cable CAB-RFR523-60 MMCX/M to SMA/F bulkhead

RF cable MMCX/M straight, x mm RG 174, SMA/F bulkhead, CAB-RFR523-60 (60 mm cable), other length on request




Cable CAB-RFR551-X U.FL to FME/M bulkhead

RF cable U.FL right angle, x mm RF cable, FME/M bulkhead, CAB-RFR551-100 (100 mm cable), CAB-RFR551-200 (200 mm cable), other length on request




Cable CAB-RFR701-X GSC to FME/M bulkhead

RF cable GSC right angle, x mm RF cable, FME/M bulkhead, CAB-RFR701-100 (100 mm cable), CAB-RFR701-200 (200 mm cable), other length on request

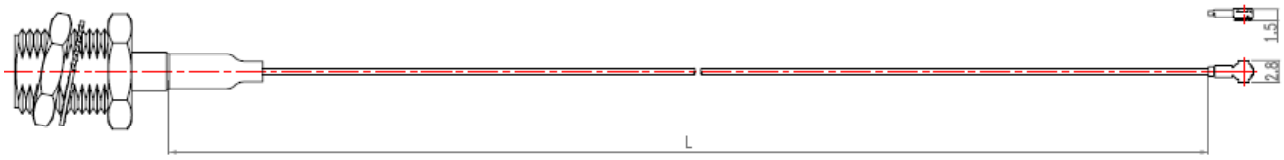


Cable CAB-RFR703-X GSC to FME/M bulkhead

RF cable GSC right angle, x mm RF cable, FME/M bulkhead, CAB-RFR703-100 (100 mm cable), CAB-RFR703-200 (200 mm cable), other length on request

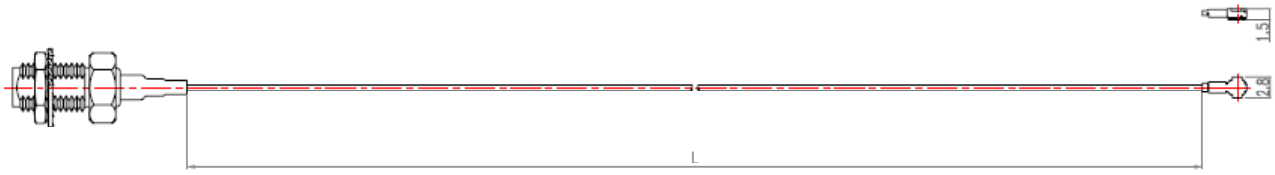


Cable CAB-RFR553-X U.FL to SMA/F bulkhead

RF cable U.FL right angle, x mm RF cable, SMA/F bulkhead, CAB-RFR553-100 (100 mm cable), CAB-RFR553-200 (200 mm cable), other length on request

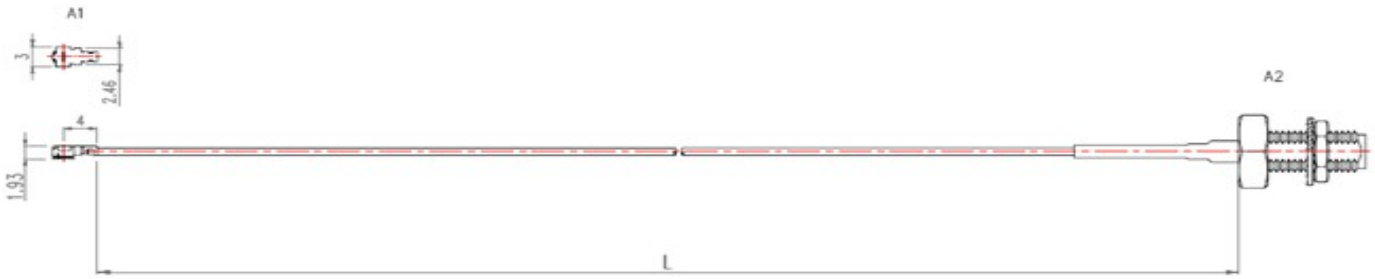


Cable CAB-RFR561-X FME/F to FME/M bulkhead

RF cable FME/F, x mm RF cable, FME/M bulkhead, CAB-RFR561-100 (100 mm cable), CAB-RFR561-250 (250 mm cable), other length on request

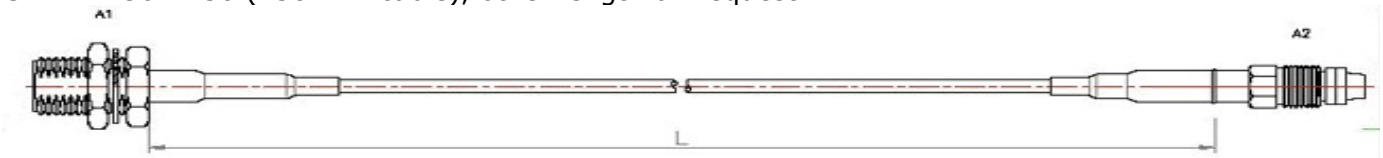

Cable CAB-RFR602-150

RF cable H.FL right angle x mm 1,32 cable, SMA/F bulkhead, CAB-RFR602-150 (150 mm cable) other length on request

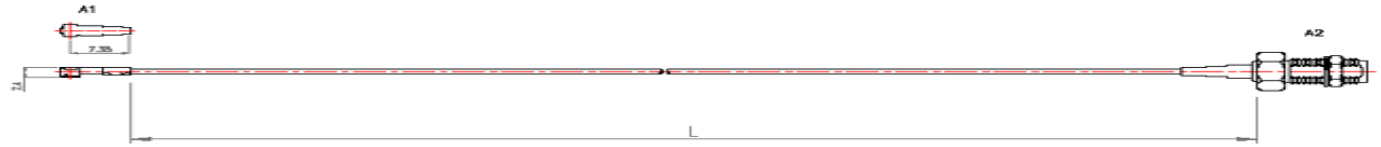

Cable CAB-RFR701-100 GSC straight to FME/M bulkhead

RF cable GSC straight x mm RG 174 cable, FME/M bulkhead, CAB-RFR701-100 (100 mm cable), CAB-RFR701-200 (200 mm cable), other length on request



Cable CAB-RFR703-100 GSC straight to SMA/M bulkhead

RF cable GSC straight x mm RG 174 cable, SMA/F bulkhead, CAB-RFR703-100 (100 mm cable), CAB-RFR703-200 (200 mm cable), other length on request




Cable CAB-RFR901-X MMCX/M to bared end

RF cable MMCX/M right angle, x mm RG316, bared end, CAB-RFR901-103 (103 mm cable), CAB-RFR901-200 (200 mm cable), other length on request




Cable CAB-RFR811-X SMA/F bulkhead to bared end

RF cable SMA/F, x mm RG 174, bared end, CAB-RFR811-100 (100 mm cable), CAB-RFR811-200 (200 mm cable), other length on request

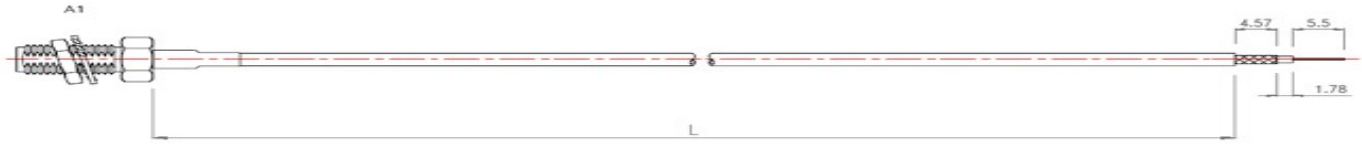


Cable CAB-RFR913-X FME/M bulkhead bared end

RF cable FME/M bulkhead, x mm RG 174, bared end, CAB-RFR913-100 (100 mm cable), CAB-RFR913-200 (200 mm cable), other length on request

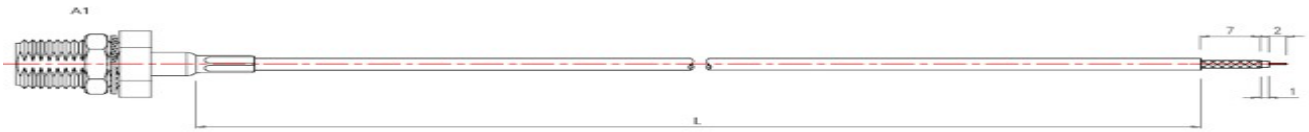


Cable CAB-RFR951-X MMCX/M to TNC bulkhead

RF cable MMCX/M right angle, x mm RG 174, TNC bulkhead, CAB-RFR951-250 (250 mm cable), other length on request

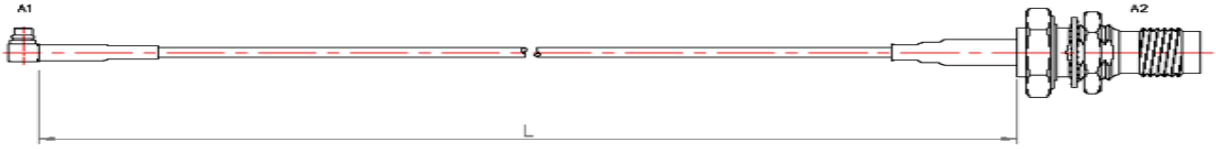


Cable CAB-RFR952-X MMCX/M to SMA bulkhead

RF cable MMCX/M right angle, x mm RG 174, SMA bulkhead, CAB-RFR952-250 (250 mm cable), other length on request

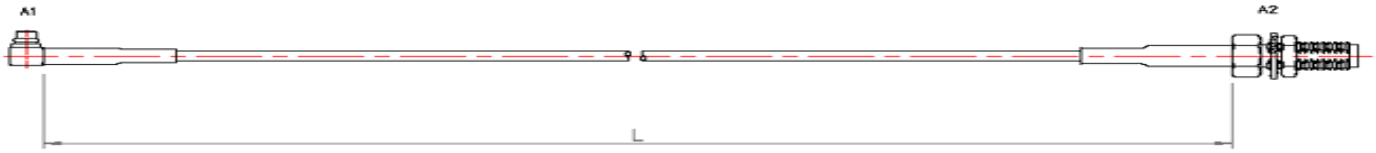

CAB-SMA/M200SMA/M-X cable SMA male to SMA female

RF cable SMA/M, x mm RG 174, SMA/F, CAB-SMA/M200SMA/F- (2000 mm cable), CAB-SMA/M400SMA/F (4000 mm cable), other length on request

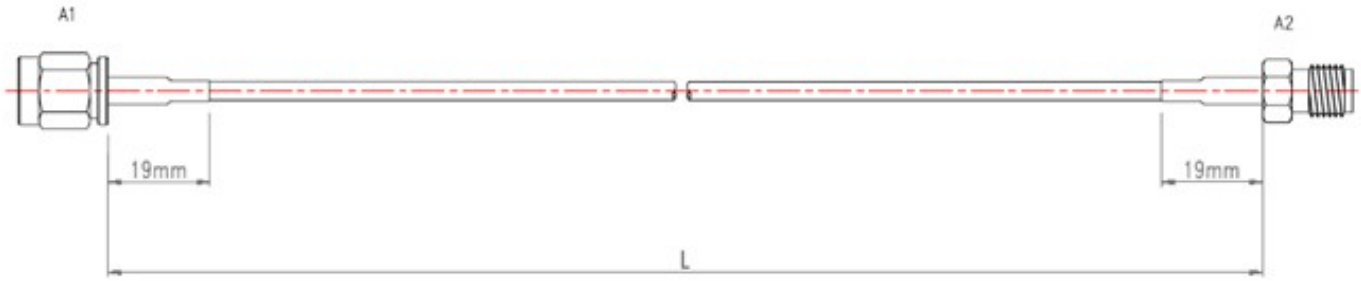


Customised cable example with MC380 connector

RF cable MMCX/M, 0,81 mm cable soldered to ANT-GXP113. U.FL or any other RF connector you require, other length on request




Example CAB-RFR953 TNC/F bulkhead to TNC male

RF cable TNC bulkhead female, x mm RG 174, TNC male, CAB-RFR953-2130 (2130 mm cable), other length on request

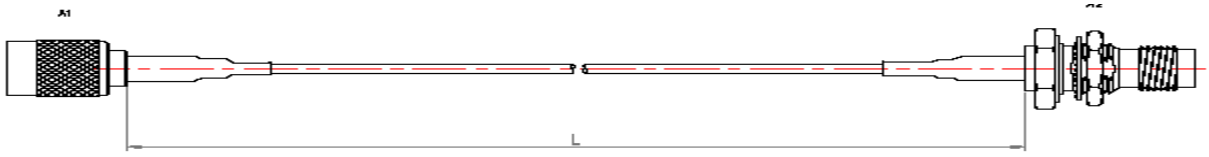


Example CAB-RFR954 MMCX/M straight to SMA/F

RF cable MMCX/M straight, x mm RG 174, SMA/F bulkhead, CAB-RFR954-400 (400 mm cable), other length on request

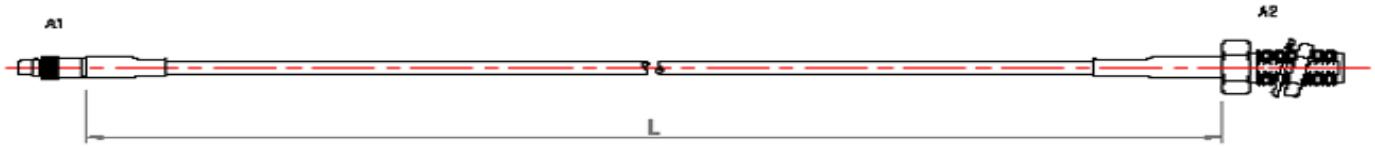


Customised CAB-RFR956 MMCX/M to open end

RF cable MMCX/M right angle, x mm RG 174, open end, CAB-RFR956-215 (215 mm cable), other length on request

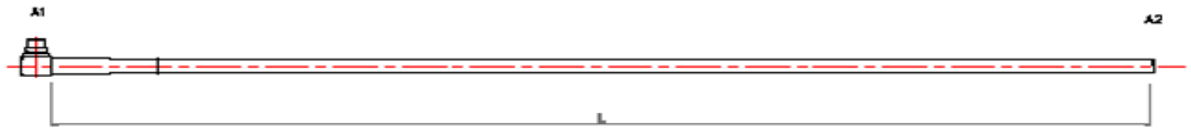

Customised CAB-RFR959


RF cable U.FL, SMA panel 4 hole jack, x mm 1,03 cable, CAB-RFR959-130 (130 mm cable), other length on request

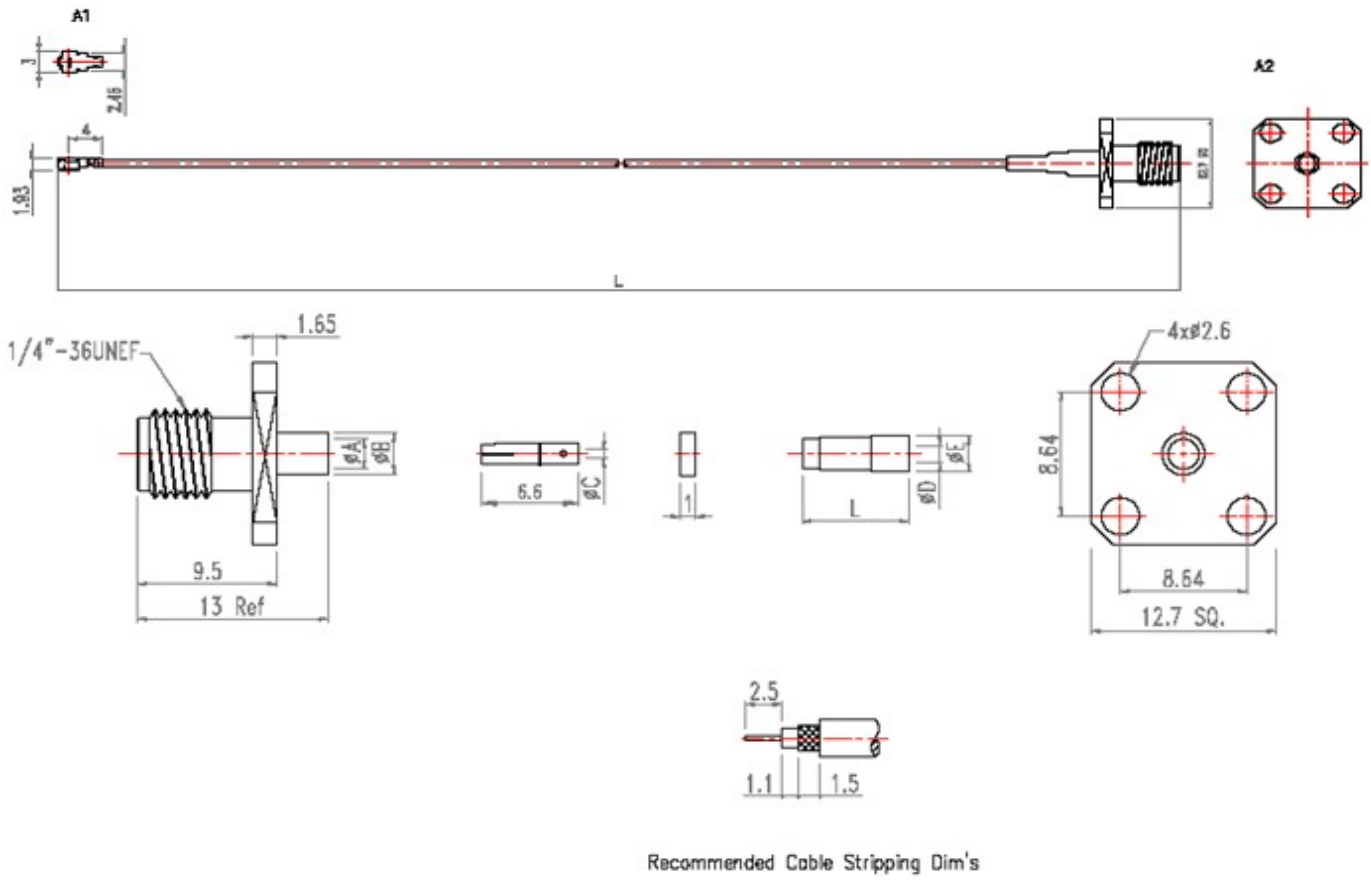


Recommended Cable Stripping Dim's

Customised CAB-RFR960 U.FL to SMA


RF cable U.FL, SMA panel 2 hole jack, x mm 1,03 cable, CAB-RFR960-130 (130 mm cable), other length on request

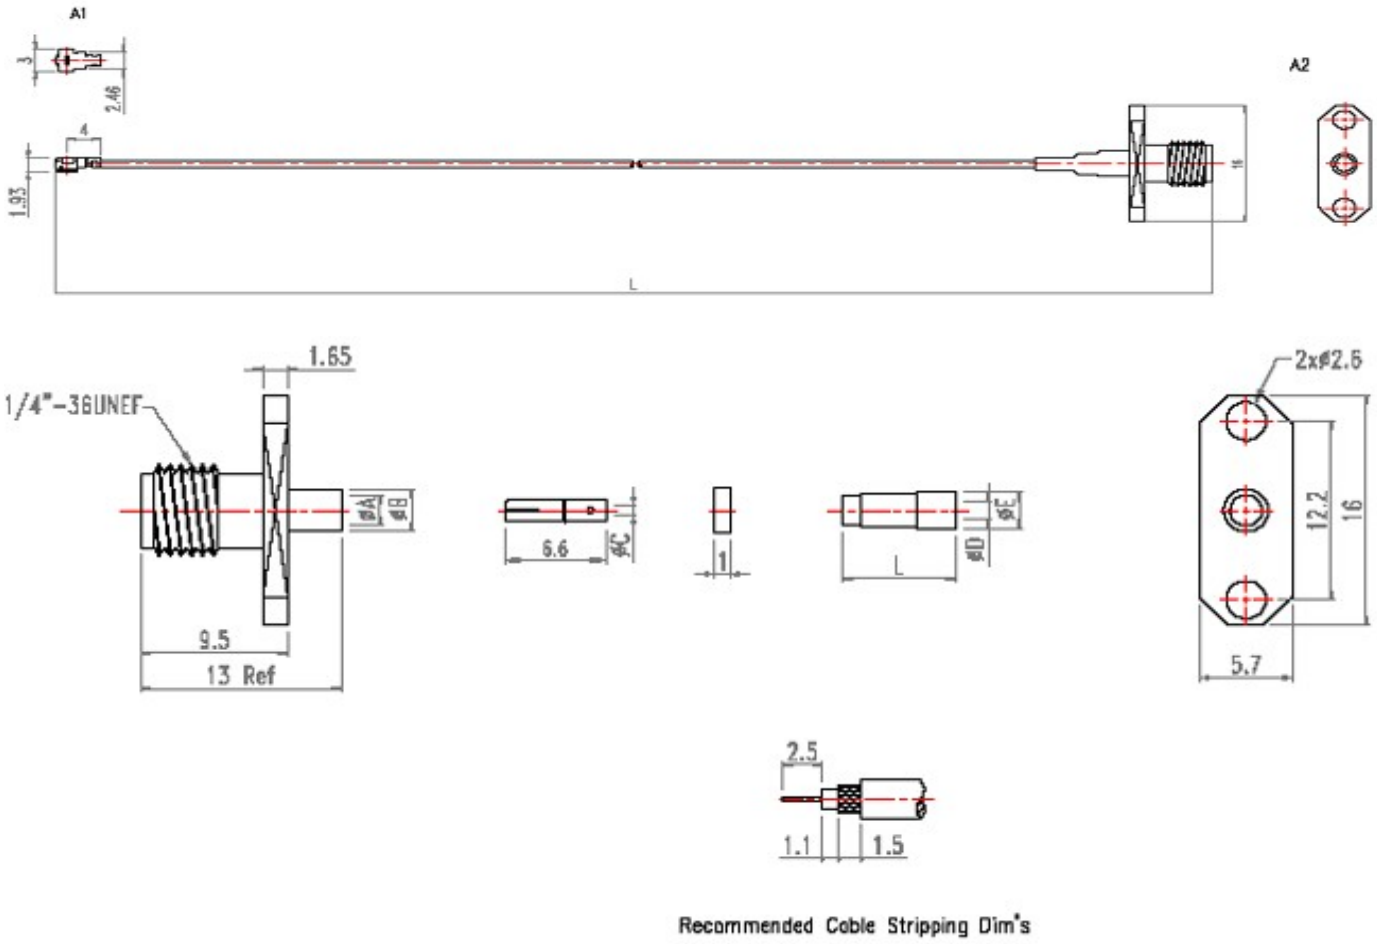


Connector FME/M bulkhead D3G

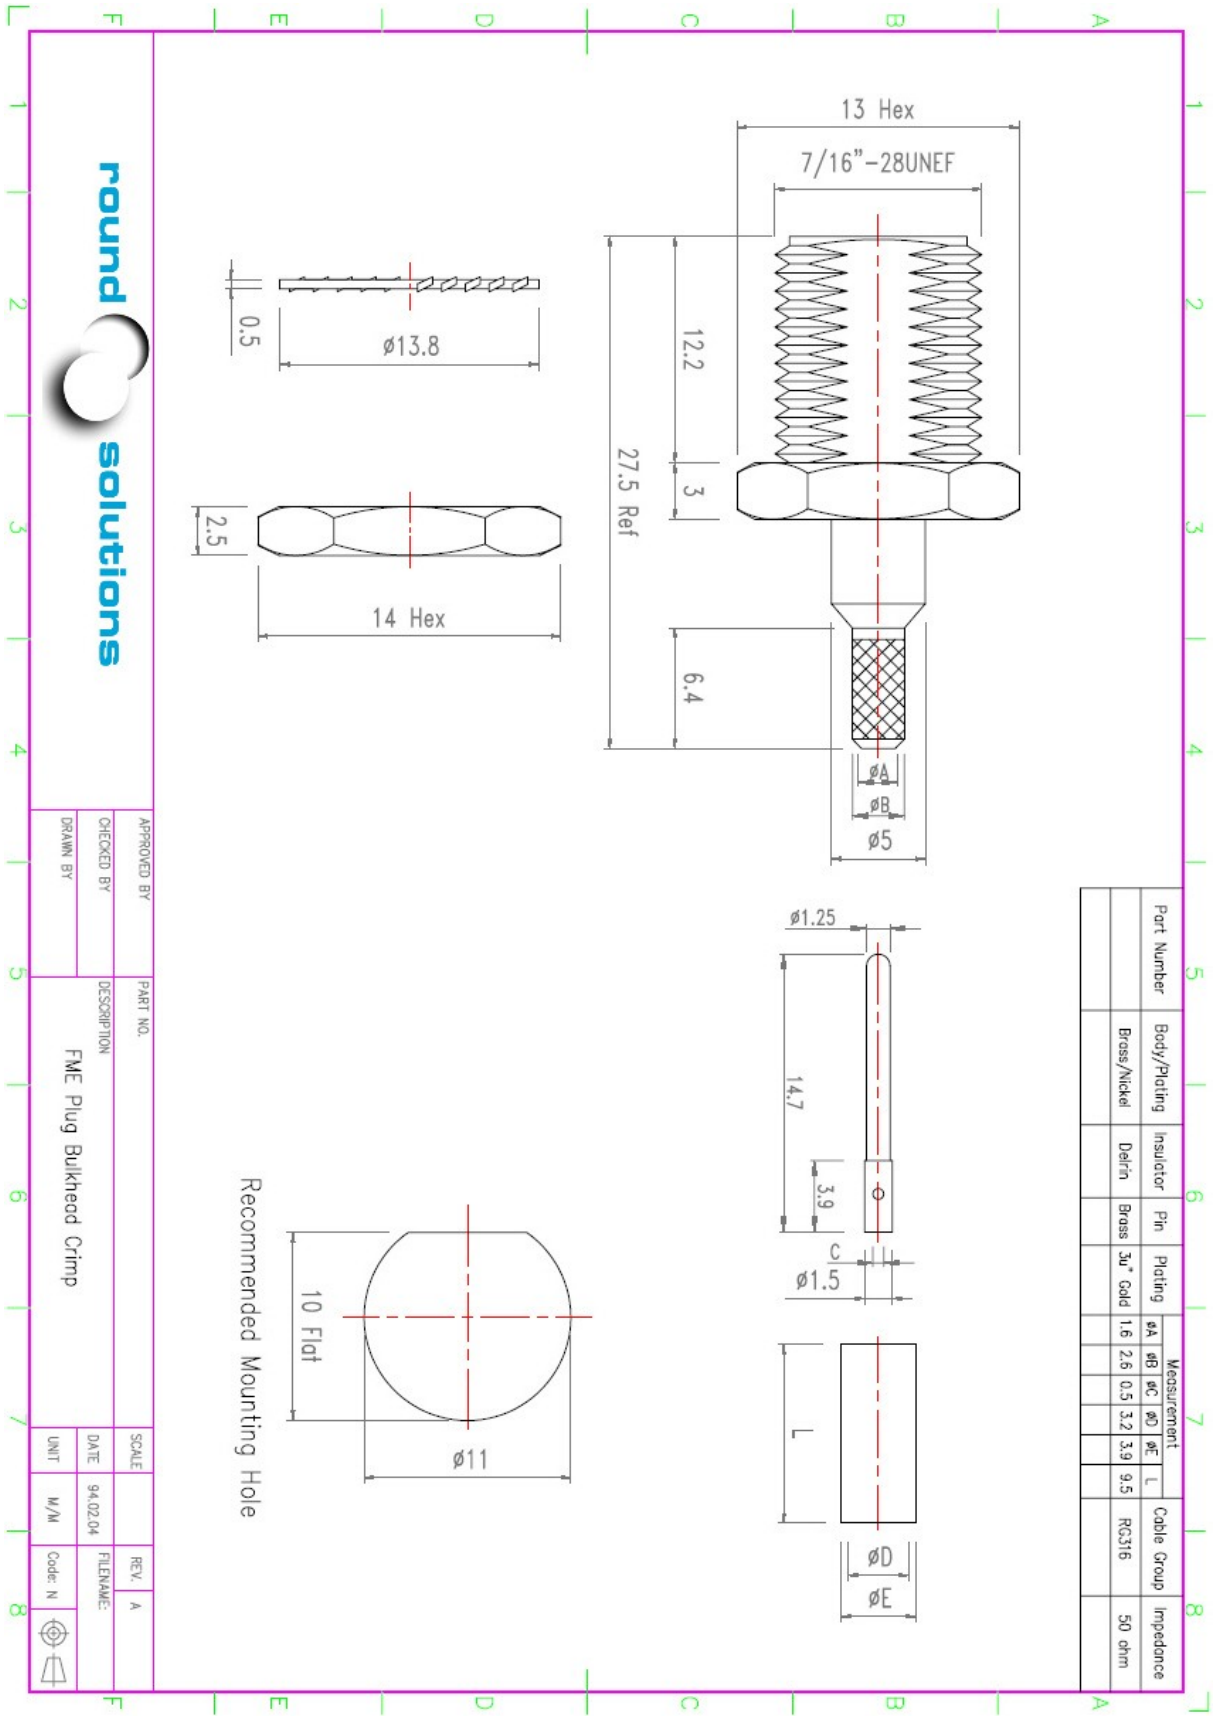

Connector SMA/F straight crimp female

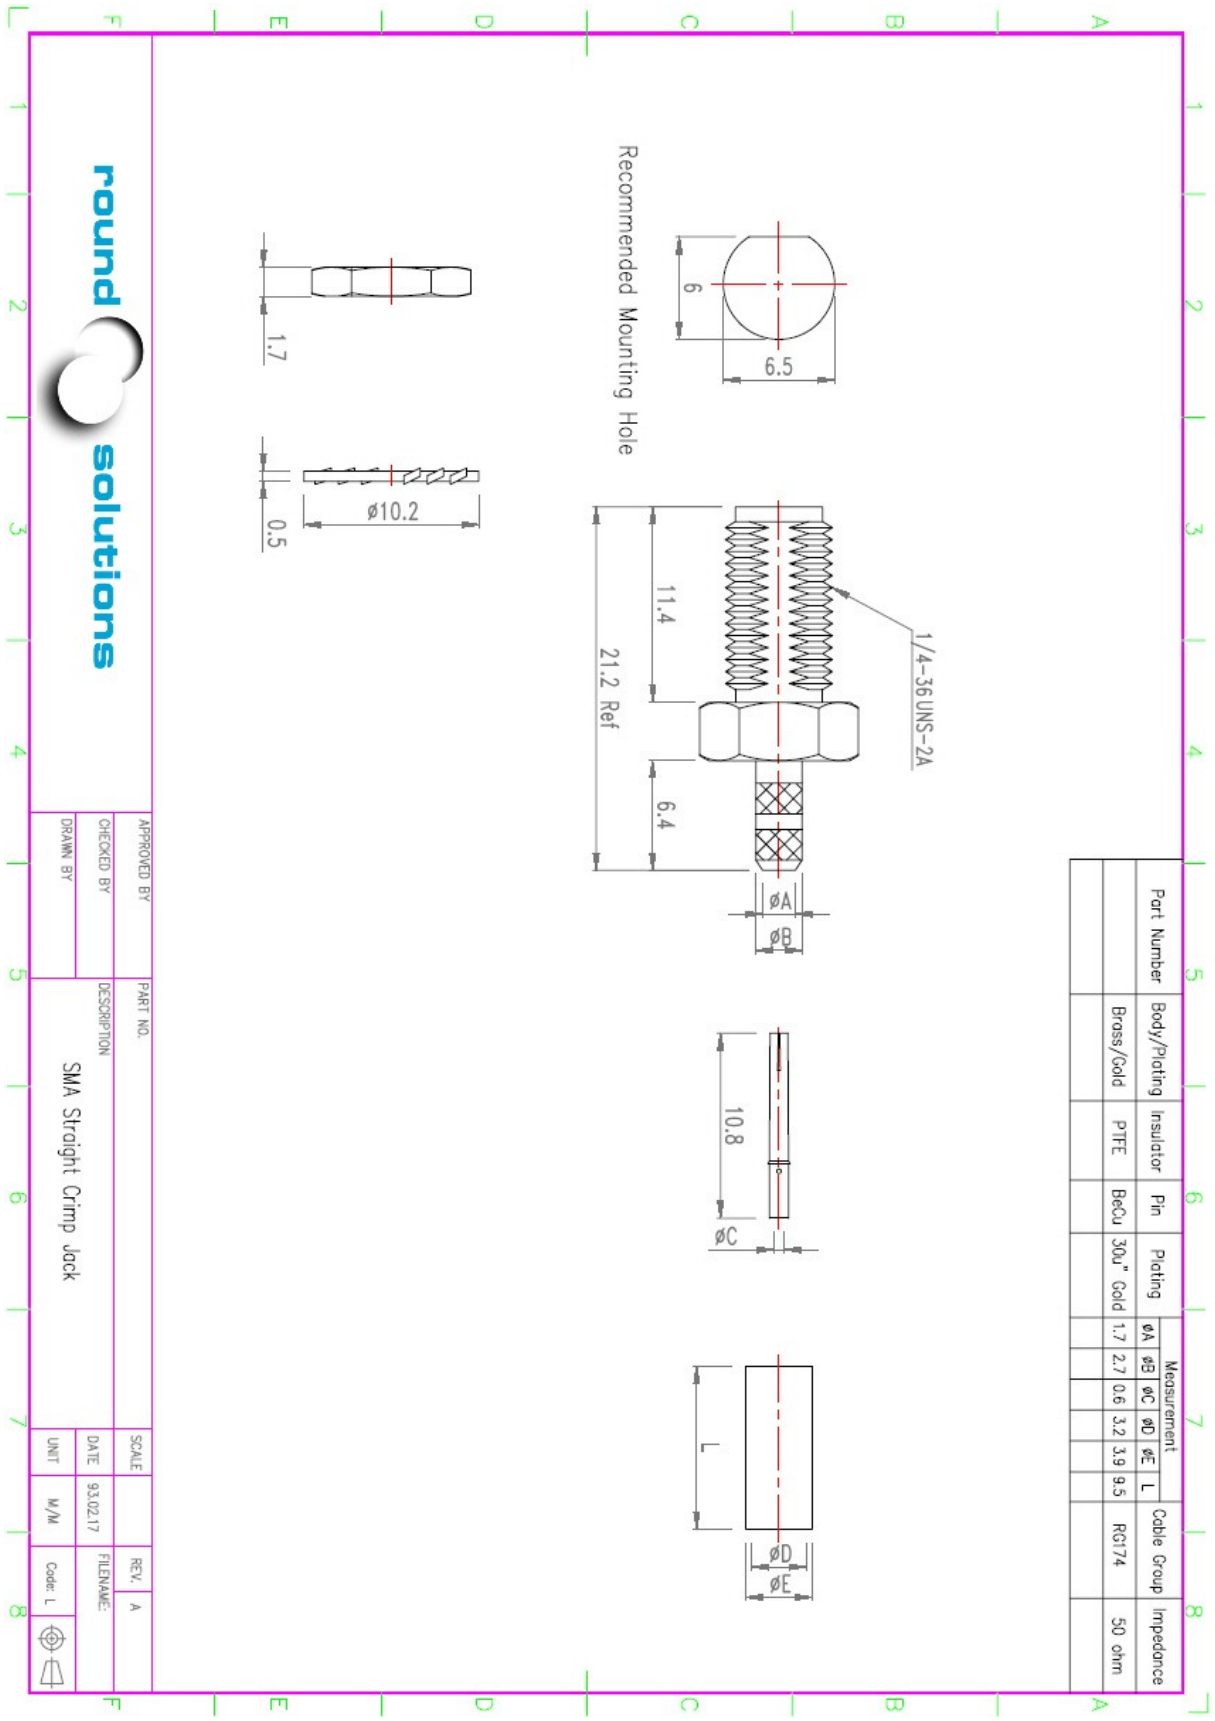

Connector MMCX/M right angle male 30G

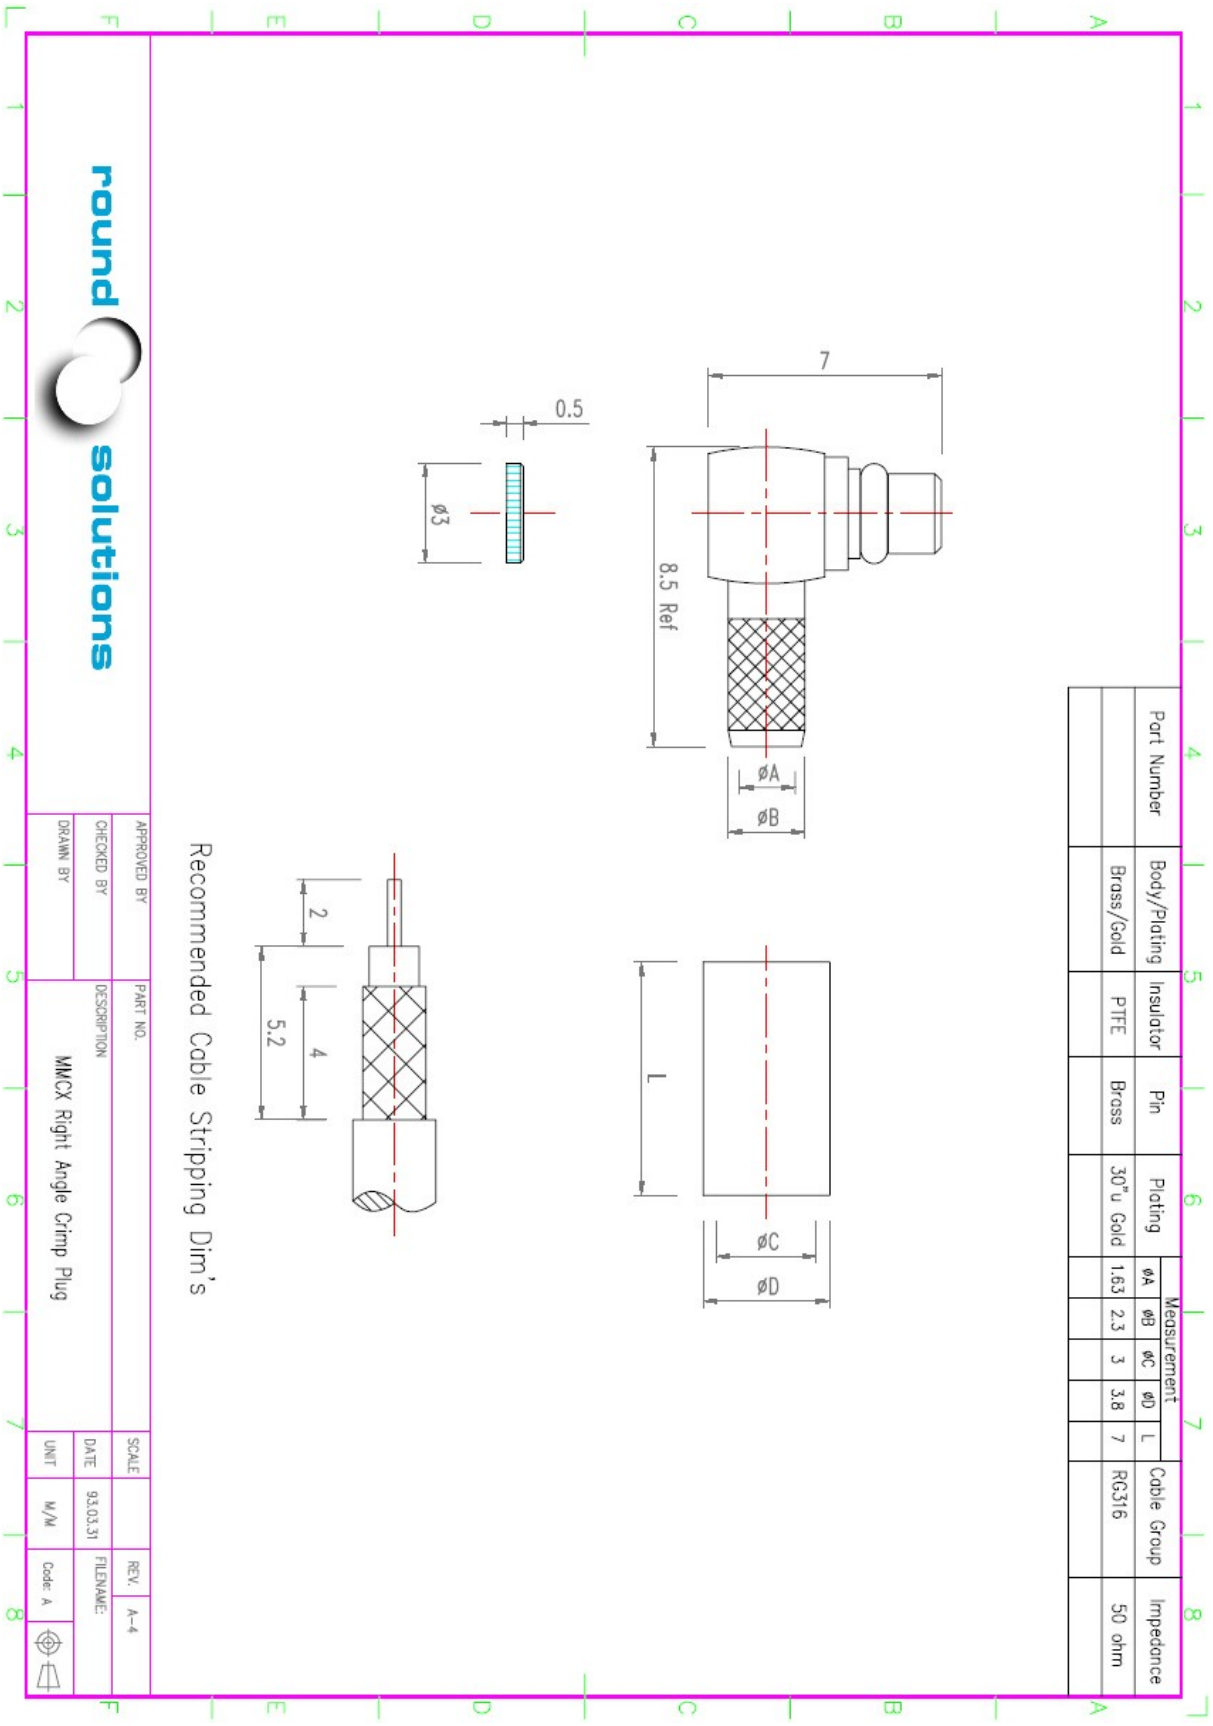

PCB mounted connectors (SMT):

PCB mounted antenna connectors for any kind of BGA modules

- RS-CON-PCB-FME/M
- CON-RS103 (right angle SMA/M)
- CON-RS209 (right angle SMA/F)
- CON-RS211 (right angle MMCX/F)
  (from left to right on the photo)

